

# Desca 55 Parquet

*Engineered Vinyl*



Floor: EVDC 5564 Herringbone Matt

**8 Colours / 1 Finish / 1 Size**

Desca 55 Parquet offers a range of sustainable, dimensionally stable, and highly scratch-resistant engineered vinyl flooring. Available in eight wood-look shades, spanning natural and warm tones, it seamlessly coordinates with complementary colours from the Desca 55 XL and Desca 55 Chevron ranges.



Floor: EVDC 5530 Herringbone Matt



Floor: EVDC 5558 Herringbone Matt



Floor: EVDC 5557 Herringbone Matt



EVDC 5530



EVDC 5563



EVDC 5552




EVDC 5557



EVDC 5558



EVDC 5562



EVDC 5554



EVDC 5564

# Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	Rigid Click 148 x 592	5	Matt	All colours

Swatch colours may vary from original. Samples should be requested.

## Specification

- Format:** Parquet
- Treatment:** PUR
- Texture:** Embossed (EVDC 5530, 5552 & 5554)  
Registered Embossed (EVDC 5557, 5558, 5562, 5563 & 5564)
- Technology:** Titanium Nano-Layer
- Edge Detail:** 4-Way Bevel
- Sustainability:** 100% phthalate-free. Low VOC. 100% recyclable. Blue Angel
- Durability:** Class 23 Domestic  
Class 33 Commercial  
Class 42 Industrial
- Application:** Internal use only. Suitable with underfloor heating
- Installation:** 5GI™ Click  
Recommended for floated installation



Floor: EVDC 5552 Herringbone Matt



Floor: EVDC 5563 Herringbone Matt

# Desca 55 Parquet

Technical Data

## PERFORMANCE & DURABILITY


Technical Characteristics	Industry Standard	Performance
Total Thickness	EN ISO 24346	5.0mm
Wear Layer Thickness	EN ISO 24340	0.55mm
Classification	EN ISO 10874	Residential: 23 Commercial: 33 Industrial: 42
Packing	EN ISO 24342	16 planks/box = 1.402m <sup>2</sup> 56 pieces/pallet = 78.512m <sup>2</sup>
Installation		Click: 5G Vålinge
CE		EN 14041:2004/AC:2010
Formaldehyde Group	EN 717-1	E1
Substances of Very High Concern	EN 717-1	SVHC free

## PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Dimensional Stability	EN ISO 23999	≤ 0.05% (norm ≤ 0.25%)
Castor Chair	ISO 4918	Type W > 25000 cycles (no damage on wear layer, no stratification)
Reaction to Fire	EN 14041 (EN 13501)	Bfl-s1
Wear Resistance	EN 13329 Annex E	≥ 7000 (norm ≥ 2000)
Residual Indentation	EN ISO 24343-1	≤ 0.02 mm (norm ≤ 0.10 mm)
Light Fastness	EN ISO 105-B02	≥ 6
Slip Resistance	EN 13893 / DIN 51130	DS/R9
Resistance to Stain & Chemicals	EN ISO 26987	Index 0 (very good)
Thermal Resistance	EN 12667	0.014m <sup>2</sup> K/W
Resistance to Large Ball	EN 13329 Annex H	1800mm (norm 1600mm)
Locking Strength	EN ISO 24334	Long edge 5.2 kN/m Short edge 6.5 kN/m
Antistatic & Electrical Properties	EN 14041 (EN 1815)	<2kV
Underfloor Heating Suitability	EN 12524	Compatible (max. 27°C)
Residential Warranty		25 years
Commercial Warranty		7 years
DoP Number		RF50055/9

Compatible with underfloor heating systems subject to M50 installation advice available on request.

Test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Ltd. cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Please refer to Domus Group Ltd. Terms & Conditions of Sale, February 2025.

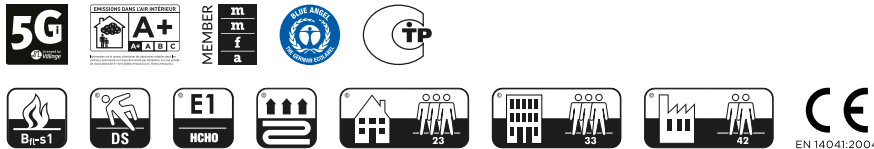

**DOMUS**

service@domusgroup.com | t: 020 8481 9567 | domusgroup.com