

Antique Marble

Porcelain Marble



Floor: DCAE 06 Lucido

4 Colours / 2 Finishes / 3 Sizes / 2 Mosaics

Antique Marble is a stunning marble-effect porcelain range that encapsulates the purity of this ancient, natural material. This range offers a beautifully classic look thanks to striking vein patterns and subtle markings.



Shower Wall: DCAE 02 Mosaic Lucido
Wall: DCAE 02 Lucido
Floor: DCAE 02 Natural

Sizes



DCAE 01




DCAE 02



DCAE 04




DCAE 06

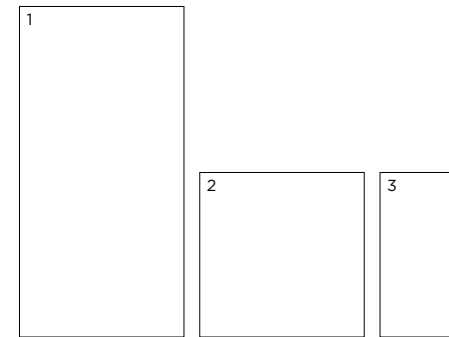

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Natural Lucido	DCAE 01, 02 & 06 All colours
2	597 x 597 (R)	9	Natural Lucido	All colours All colours
3	597 x 297 (R)	9	Natural Lucido	All colours All colours

(R) Rectified size - square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.


3D Mosaic




DCAE 01



DCAE 02




DCAE 04



DCAE 06


Mosaic




DCAE 01



DCAE 02



DCAE 04




DCAE 06



Wall: DCAE 02 Mosaic Lucido

Mosaics & Special Pieces

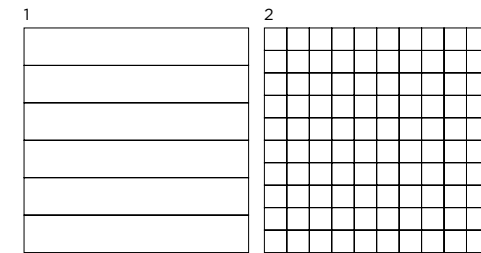

	Size (mm)	Thickness	Finish	Colour Availability
1	3D Mosaic 297 x 47 on 297 x 297 sheet	9	Natural Lucido	All colours All colours
2	Mosaic 27 x 27 on 297 x 297 sheet	9	Natural Lucido	DCAE 01, 04 & 06 All colours
	Plinth Skirting 597 x 46	9	Natural Lucido	All colours All colours

(R) Rectified size - square edge with bevel. Samples should be requested.

Antique Marble

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DCAE

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.35% ± 0.2% (Grip Finish)
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Grip
Areas with bare feet	DIN 51097	B over 18° to 24°	Grip
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	3200 N (Average value)
Resistance to surface abrasion	BS EN ISO 10545-7	PEI *see classifications below	Class 3 – DCAE 02 & 06 Class 4 – DCAE 01, 03, 04 & 05
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA - Natural & Grip GLB - Lucido
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4-5 - Natural & Grip Class 3-4 - Lucido
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			DCAE 04 – 0% DCAE 01, 02 & 06 – 20.5%

*PEI classifications

- PEI 2 - Light traffic
- PEI 3 - Light to moderate traffic
- PEI 4 - Moderate to heavy traffic
- PEI 5 - Heavy to extra heavy traffic

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com