

Terra Crea

Porcelain Terracotta



Wall & Floor: DKTE 05 Snapped

5 Colours / 3 Finishes / 11 Sizes / 3 Mosaics

Terra Crea creates spaces with a perfectly coordinated aesthetic, using the unique textural finish options paired with various mosaic choices for a completely tactile experience. Refer to Terra Crea 20mm for 20mm-thick tile options for use with External Support Systems.



Floor: DKTE 04 Snapped




Wall: DKTE 03 Strip Mosaic Natural




Floor: DKTE 02 Natural



DKTE 01 Natural



Rude



Snapped



DKTE 02 Natural



Rude



Snapped




DKTE 03 Natural



Rude



Snapped



DKTE 04 Natural



Rude



Snapped



DKTE 05 Natural




Rude



Snapped

Sizes

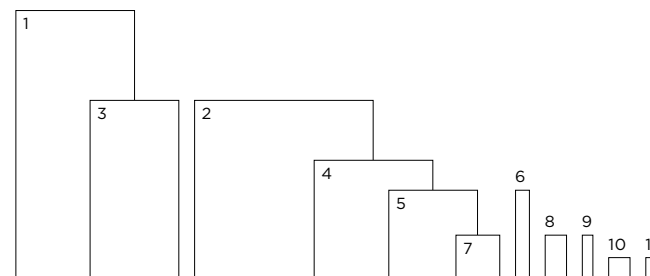


	Size (mm)	Thickness	Finish	Colour Availability
1	1797 x 797 (R)	10	Natural Rude	All colours All colours
2	1197 x 1197 (R)	10	Natural	All colours
3	1197 x 597 (R)	10	Natural Rude	All colours All colours
4	797 x 797 (R)	10	Natural Rude	All colours All colours
5	597 x 597 (R)	10	Natural Rude	All colours All colours
6	597 x 97	10	Snapped	All colours
7	297 x 297	10	Snapped	All colours
8	297 x 147	10	Snapped	All colours
9	297 x 75	10	Snapped	All colours
10	147 x 147	10	Snapped	All colours
11	147 x 75	10	Snapped	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Mosaics and special pieces shown on next page.


Mosaic 15 x 15mm



DKTE 01




DKTE 02



DKTE 03



DKTE 04



DKTE 05

3D Mosaic 74.5 x 74.5mm



DKTE 01



DKTE 02



DKTE 03




DKTE 04




DKTE 05

Strip Mosaic 197 x 32mm




DKTE 01



DKTE 02




DKTE 03



DKTE 04




DKTE 05

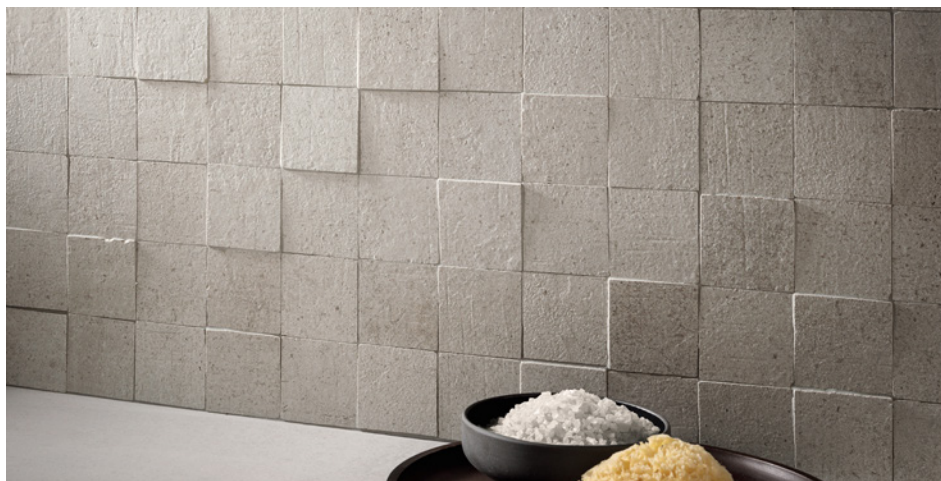

Wall: DKTE 01 3D Mosaic Natural






Mosaics & Special Pieces

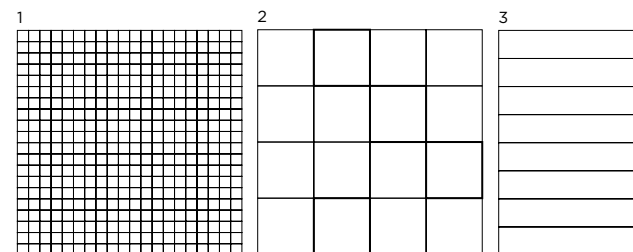

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 15 x 15 on 297 x 297 sheet	10	Natural	All colours
2	3D Mosaic 74.5 x 74.5 on 297 x 297 sheet	10	Natural	All colours
3	Strip Mosaic 197 x 35 on 297 x 197 sheet	10	Natural	All colours
	Skirting 597 x 46 (R)	10	Natural	All colours
	Elemento A Elle 297 x 75	10	Snapped	All colours
	Elemento A Elle 147 x 75	10	Snapped	All colours
	Bullnose Step Tread 297 x 147	10	Snapped	All colours
	Bullnose Step Tread 297 x 75	10	Snapped	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.

V3 - High Shade Variation

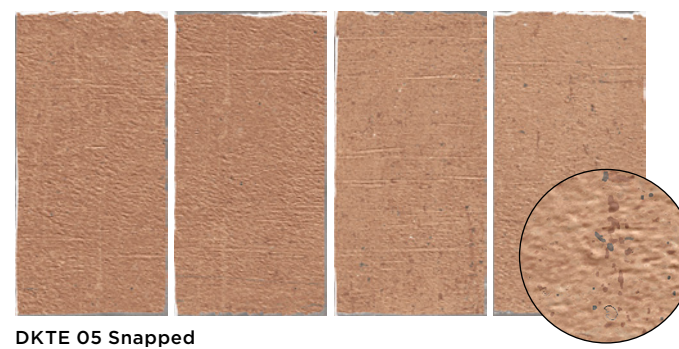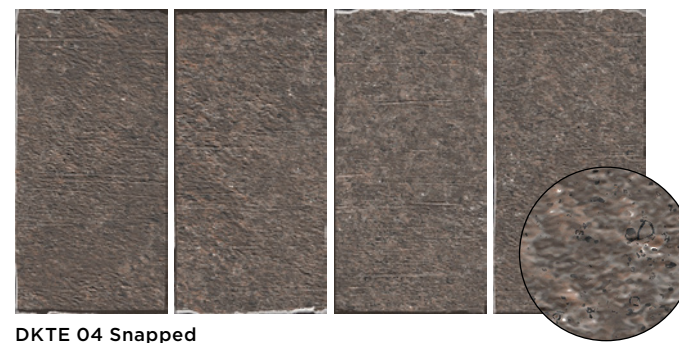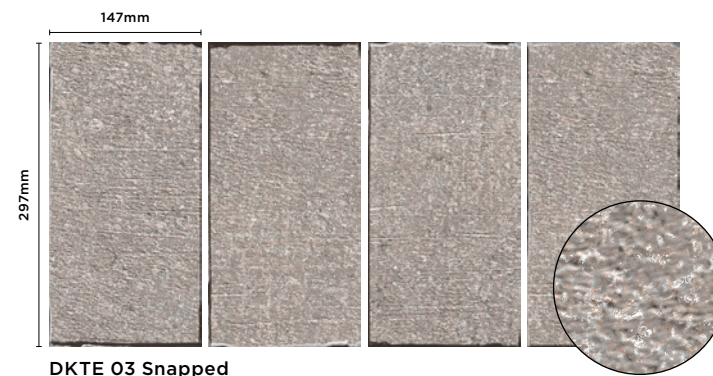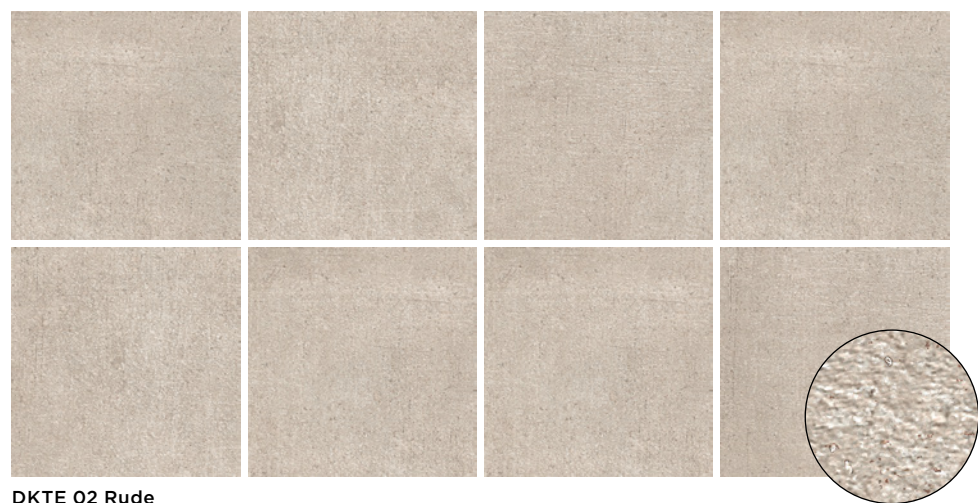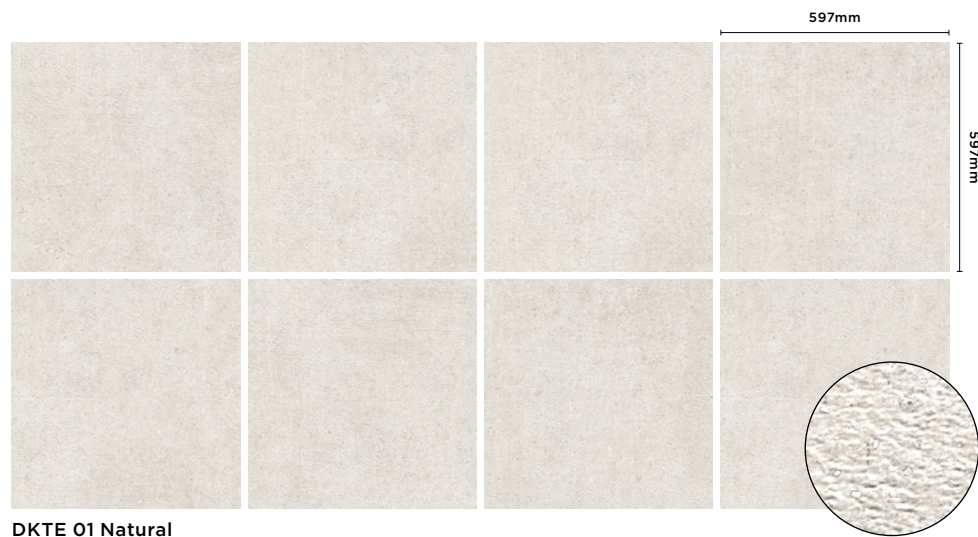

The 'Snapped' finish is the result of a unique, carefully-crafted process carried out on the edges of the tile to create a distinctive, irregular look that makes every single tile a one-off, whose beauty lies in its imperfections.

Terra Crea

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)
Use: Floors & Walls
Product Code: DKTE

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Natural & Snapped Rude
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Natural & Snapped Rude
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.04% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	3200 N (Typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	< 132 mm ³ (Typical value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	7x10 ⁻⁶ /°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			40%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
Dec. 2022