

Industrial


Porcelain Concrete



Floor: DFDL 06 Natural

6 Colours / **4** Finishes / **6** Sizes / **2** Mosaics / **3** Décors

Industrial is a modern porcelain concrete-effect tile range in neutral and grey tones. Subtle surface texture and detail replicates the authentic look of concrete. View Industrial 20mm for outdoor tiles, and Industrial Magnum for 6mm-thick lightweight slabs.

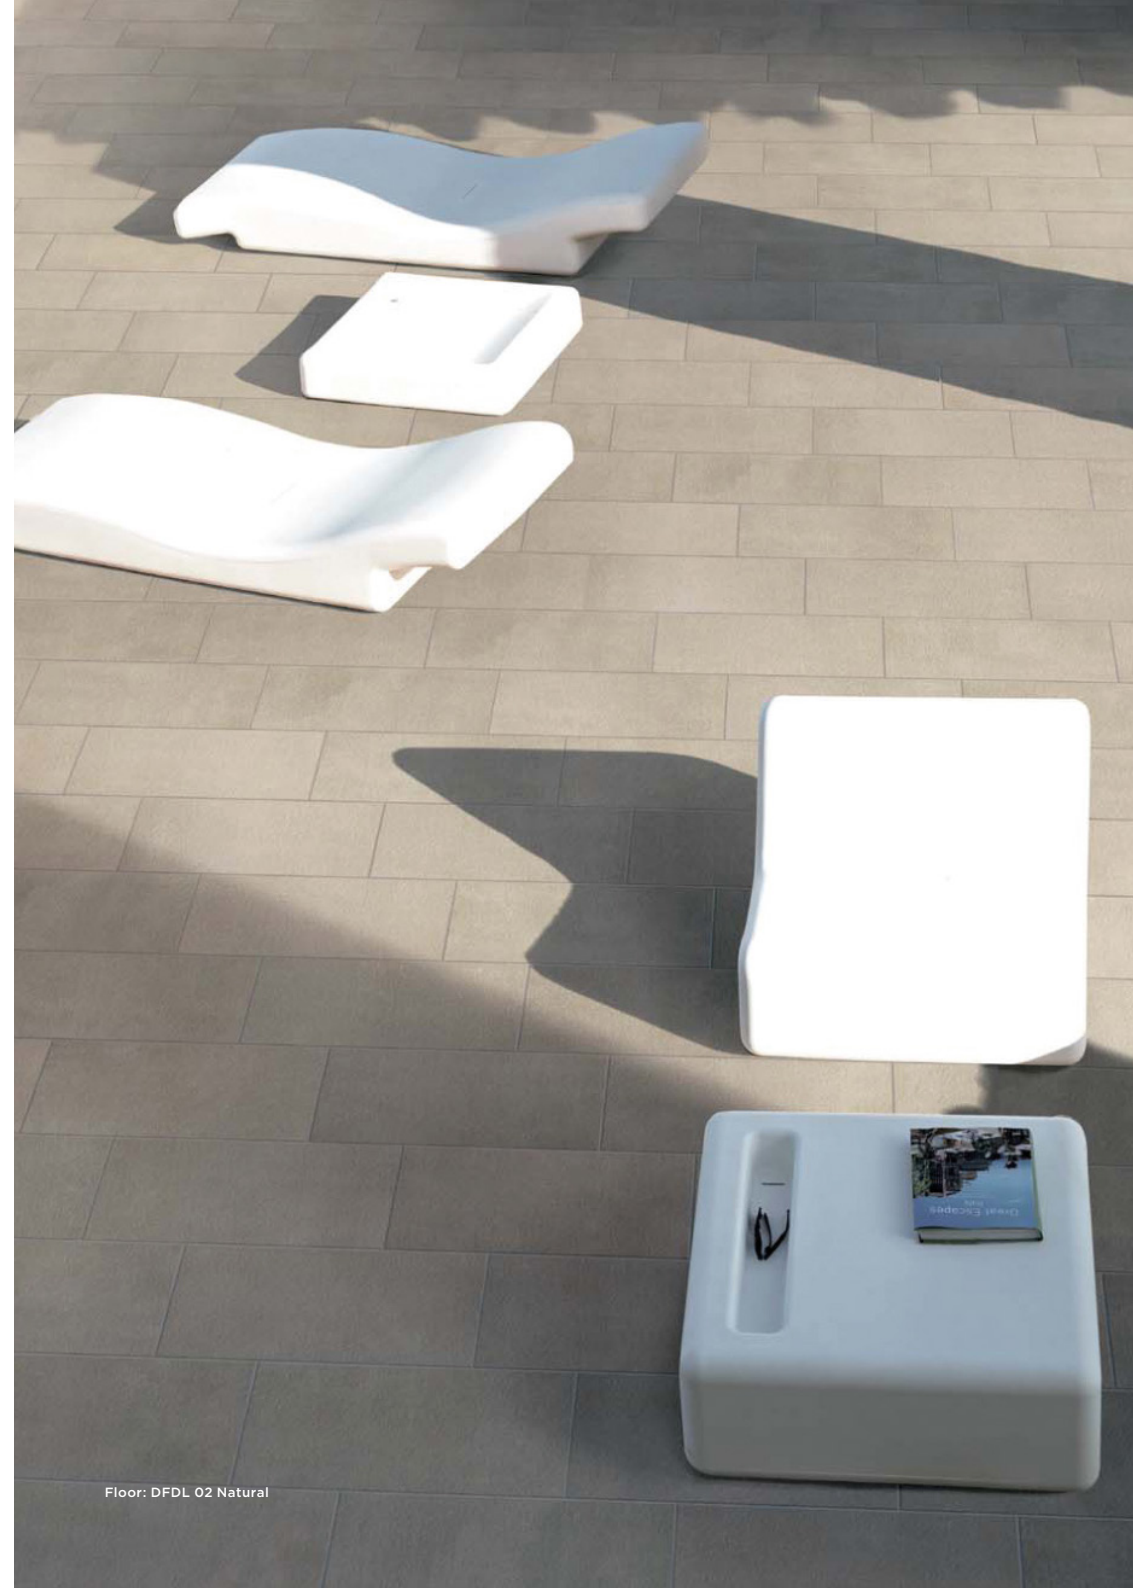

Floor: DFDL 02 Natural





DFDL 01



DFDL 02



DFDL 04



DFDL 03




DFDL 06



DFDL 05

Sizes

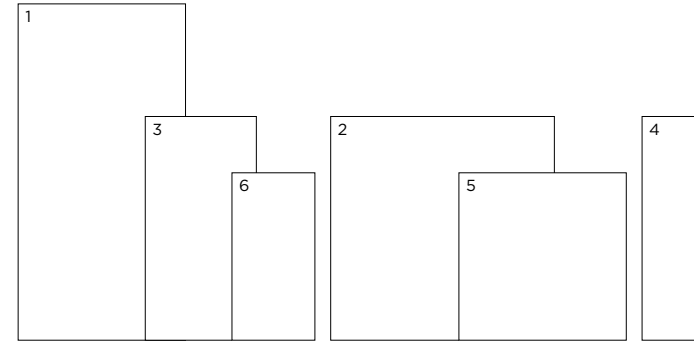

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Natural Soft Natural Grip	All colours All colours DFDL 02, 03, 04 & 05
2	797 x 797 (R)	9	Natural Soft	All colours All colours
3	797 x 397 (R)	9	Natural Soft Natural Grip	All colours All colours DFDL 02, 03 & 05
4	797 x 197 (R)	9	Natural Soft	All colours All colours
5	597 x 597 (R)	9	Natural Soft Natural Grip	All colours All colours DFDL 02, 03 & 05
6	597 x 297 (R)	9	Natural Soft Bush Hammered	All colours All colours All colours


(R) Rectified size - square edge with bevel. Mosaics and décors shown on next page.
Swatch colours may vary from original. Samples should be requested.

V2 - Moderate
Shade Variation


DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


Decoro Décor A




DFDL 01 & 02



DFDL 02 & 05



DFDL 03 & 06



DFDL 04 & 06

Decoro Décor B



DFDL 01 & 02



DFDL 02 & 05




DFDL 03 & 06



DFDL 04 & 06

Mosaics & Décors

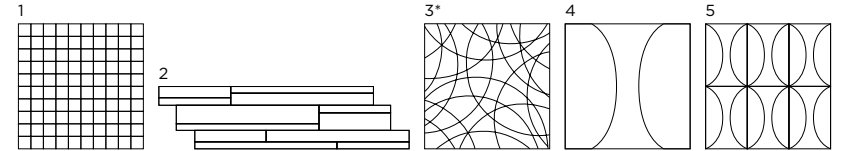

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 30 x 30 on 300 x 300 sheet	9	Natural	All colours
2	3D Listello Sfalsato Module on 600 x 150 sheet	9	Soft	Mix of DFDL 01, 02 & 05 Mix of DFDL 03, 04 & 06
3	Puzzle Décor* 1600 x 1600	9	Natural	All colours
4	Decoro Décor A 300 x 300	9	Soft	Mix of DFDL 01 & 02 Mix of DFDL 02 & 05 Mix of DFDL 03 & 06 Mix of DFDL 04 & 06
5	Decoro Décor B 300 x 300	9	Soft	Mix of DFDL 01 & 02 Mix of DFDL 02 & 05 Mix of DFDL 03 & 06 Mix of DFDL 04 & 06
	Plinth Skirting 600 x 46	9	Natural Soft	All colours All colours
	Step Tread 1200 x 330 x 30	9	Natural Soft	All colours All colours
	Angle Step Tread 1200 x 330 x 30	9	Natural Soft	All colours All colours
	Elemento A Elle 600 x 150 x 6	9	Bush Hammered	All colours

Swatch colours may vary from original. Samples should be requested.

*Puzzle Décor line drawing not to scale.



DOMUS

Industrial

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DFDL

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.35%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R10 from 10° to 19° R11 from 19° to 27°	Soft Natural Bush Hammered
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Natural Bush Hammered
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	3200 N (Average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (Average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA ULA-UHB - Soft finish only
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA UHA-UHB - Soft finish only
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 3-4
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com