Primavera

Lightweight Slabs / Porcelain Terrazzo

Wall & Floor: DMPV 01 Natural

5 Colours / **1** Finish / **2** Sizes

Primavera resembles the natural element with all its irregularities, which are perceptible to both sight and touch, created by the random application of colour ceramic inserts onto a pure-coloured base. Suitable for use both internally and externally.

Design Barber & Osgerby

MUTINA

Wall & Floor: DMPV 03 Natural

Wall & Floor: DMPV 02 Natural

Back Wall: DMPV 04 Natural
Front Wall & Floor: DMPV 01 Natural

DMPV 01

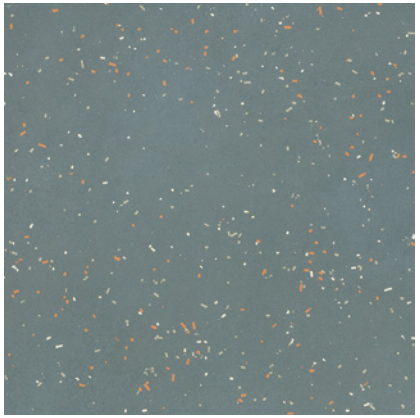

DMPV 03

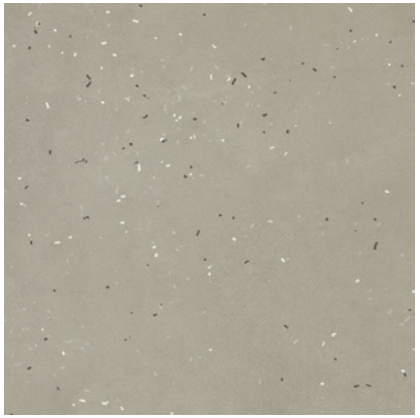

DMPV 02

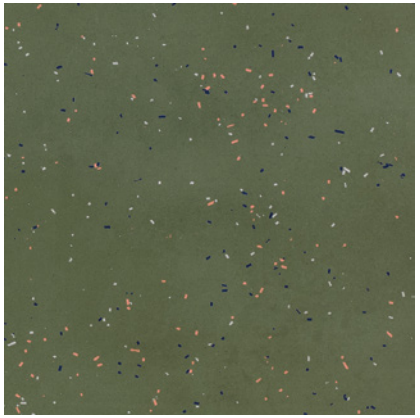

DMPV 04

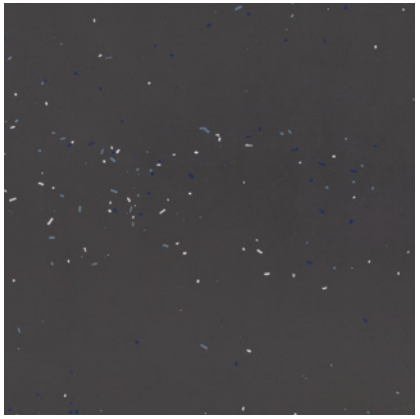

DMPV 05

Sizes

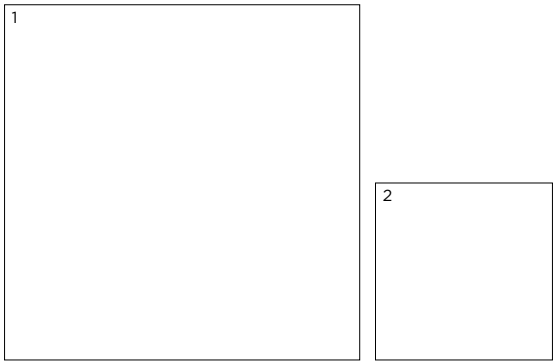

	Size (mm)	Thickness	Finish	Colour Availability
1	1190 x 1190 (R)	6	Natural	All colours
2	594 x 594 (R)	6	Natural	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.

V3 – High
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Primavera

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DMPV

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ±2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ±0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ±1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ±2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ±2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Natural
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.06% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 1300 N	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 35 N/mm^2	Conforms
Resistance to abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm^3	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤$7x10^{-6}$ $°C^{-1}$ (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes		$A1_{FL}$/A1
Recycled content			14%

ENVIRONMENTAL PRODUCT DECLARATION EPD ISO 14025:2010 CERTIFIED

ISO 9001:2008 CERTIFIED ISO 14001:2004 CERTIFIED

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

JULY 2019

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com