

LX Hausys Decotile 55

Engineered Vinyl



30 Colours / 1 Finish / 2 Sizes

From trend-setting grey wood, through contemporary mid tones to more traditional dark wood and a vast array of stone effects, the diversity of LX Hausys Decotile 55 makes it the perfect choice for a variety of installations.



Floor: EVLX 112-55 Matt



Floor: EVLX 120-55 Matt



Floor: EVLX 104-55 Matt

Sizes: Wood-Effect



EVLX 101-55



EVLX 105-55



EVLX 107-55



EVLX 108-55



EVLX 102-55




EVLX 118-55




EVLX 112-55



EVLX 111-55



EVLX 122-55



EVLX 116-55




EVLX 104-55




EVLX 120-55




EVLX 103-55




EVLX 110-55




EVLX 109-55




EVLX 119-55




EVLX 115-55




EVLX 113-55




EVLX 114-55



EVLX 121-55



EVLX 106-55



EVLX 117-55



	Size (mm)	Thickness	Finish	Colour Availability
1	Dryback 180 x 1200	2.5	Matt	EVLX 101-55 to 122-55

Swatch colours may vary from original. Samples should be requested.

Specification

Format:	Plank
Treatment:	PUR
Edge Detail:	4-way bevel
Sustainability:	100% phthalate-free. Low VOC.
Durability:	Class 23 Domestic Class 33 Commercial Class 42 Industrial
Application:	Internal use only. Suitable with underfloor heating
Installation:	Recommended for bonded installation
Wear Layer:	0.55mm
Residential Warranty:	30 years
Commercial Warranty:	10 years

DOMUS

service@domusgroup.com | t: 020 8481 9567 | domusgroup.com



EVLX 151-55



EVLX 157-55




EVLX 154-55



EVLX 152-55




EVLX 155-55

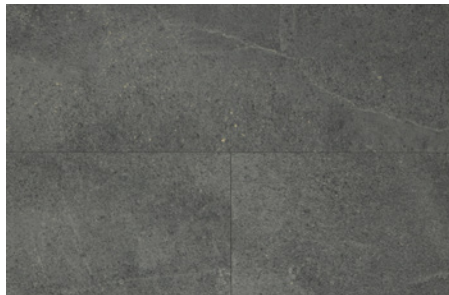

EVLX 156-55



EVLX 158-55

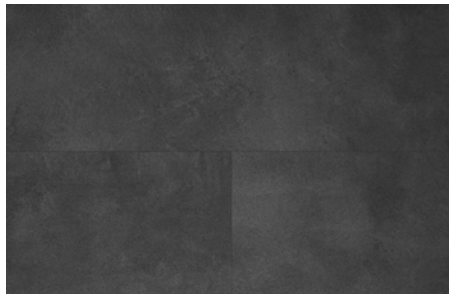

EVLX 153-55

Sizes: Stone-Effect



	Size (mm)	Thickness	Finish	Colour Availability
1	Dryback 300 x 600	2.5	Matt	EVLX 151-55 to 158-55

Swatch colours may vary from original. Samples should be requested.

Specification

Format:	Tile
Treatment:	PUR
Edge Detail:	4-way bevel
Sustainability:	100% phthalate-free. Low VOC.
Durability:	Class 23 Domestic Class 33 Commercial Class 42 Industrial
Application:	Internal use only. Suitable with underfloor heating
Installation:	Recommended for bonded installation
Wear Layer:	0.55mm
Residential Warranty:	30 years
Commercial Warranty:	10 years

LX Hausys Decotile 55


Technical Data

PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Type of Flooring	EN ISO 10582	PVC Heterogeneous
Straightness & Squareness	EN ISO 24342	≤ 0.15% / ≤ 0.35mm
Classification	EN ISO 10874	Class 23/33/42
Weight	EN ISO 23997	4.5kg/sqm
Wear Resistance	EN 660-2	T
Residual Indentation	EN ISO 24343-1	≤ 0.1mm
Dimensional Stability	EN ISO 23999	< 0.10%
Curling	EN ISO 23999	≤ 2mm
Light Fastness	EN ISO 105-B02	≥ 6
Furniture Leg Resistance	EN ISO 16581	No Crack, No Damage
Castor Chair Resistance	EN ISO 4918	No Change
Reaction to Fire	EN 13501-1	Bfl-s1

NB: Compatible with underfloor heating systems - subject to K21 installation advice available on request.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Limited cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Warranty is valid only when installed in accordance with LX Hausys Installation & Maintenance guide. Errors & omissions excepted. Please refer to Domus Group Limited Terms & Conditions of Sale, March 2024.

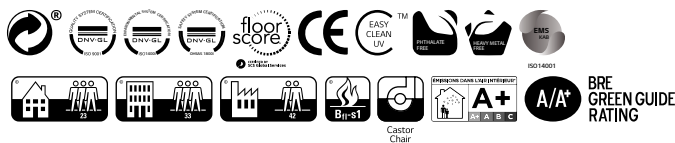

Technical Data

Engineered Vinyl

PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Stain Resistance	EN ISO 26987	No Change PUR Surface Treatment
Slip Resistance	BS EN ISO 10545-17 (DIN 51130)	R10 (from 10° to 19°)
Acoustic Insulation	EN ISO 717-2	3dB
Electrostatic Performance	EN 1815	< 2kV
Thermal Resistance	EN ISO 12667	0.0042m ² .K/W
Underfloor Heating		Suitable Max. 29.4°C 85°F
Formaldehyde Group	EN 14041:2004/AC:2006	E1
CE Marking	EN 14041:2004/AC:2006	DOP N° 19EDB-DOP-09
TVOC After 28 Days	ISO 16000	A+ (Eurofins 392-201800200803_E_EN)
REACH	N° SVHC	SGS AYAA18-62889

NB: Compatible with underfloor heating systems - subject to K21 installation advice available on request.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Limited cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Warranty is valid only when installed in accordance with LX Hausys Installation & Maintenance guide. Errors & omissions excepted. Please refer to Domus Group Limited Terms & Conditions of Sale, March 2024.

DOMUS

service@domusgroup.com | t: 020 8481 9567 | domusgroup.com