Tuscany

Porcelain Stone

Wall: DGTC 01 Soft
Sink Unit: DGTC 01 Mosaic Matt
Bedroom Floor & Stairs: DGTC 03 Soft
Floor: DGTC 01 Soft

4 Colours / **3** Finishes / **4** Sizes / **2** Décors / **1** Mosaic

Tuscany is a porcelain tile range that seamlessly blends the enduring elegance of Orcia stone with exceptional ceramic artistry. Drawing inspiration from the inherent strength and subtle sophistication of the Tuscan landscape, this range encapsulates the very essence of nature and history.

Floor: DGTC 03 Soft

DGTC 01

DGTC 02

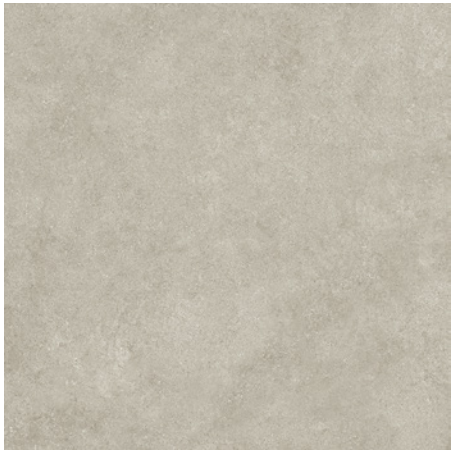

DGTC 03

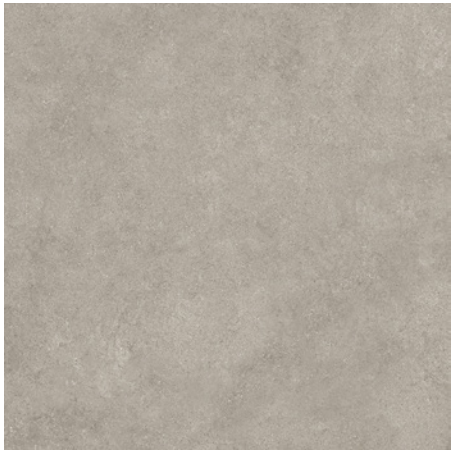

DGTC 04

Sizes

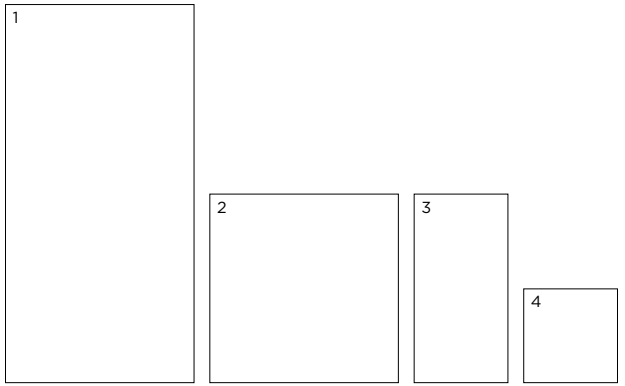

	Size (mm)	Thickness	Finish	Colour Availability
1	2382 x 1190 (R)	9	Matt	All colours
2	1190 x 1190 (R)	9	Matt	All colours
			Soft	All colours
			Outdoor	DGTC 01 & 03
3	1190 x 594 (R)	9	Matt	All colours
			Soft	All colours
			Outdoor	DGTC 01 & 03
4	594 x 594 (R)	9	Matt	All colours
			Soft	All colours
	Skirting 1190 x 71	9	Matt	All colours
			Soft	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested. Mosaics and décors shown on next page.

V2 – Moderate Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Mosaics & Décors

Mosaic 15 x 15mm



DGTC 01 Mosaic



DGTC 02 Mosaic



DGTC 03 Mosaic



DGTC 04 Mosaic

D-Line Décor 1190 x 1190 x 9mm

DGTC 01 D-Line Décor

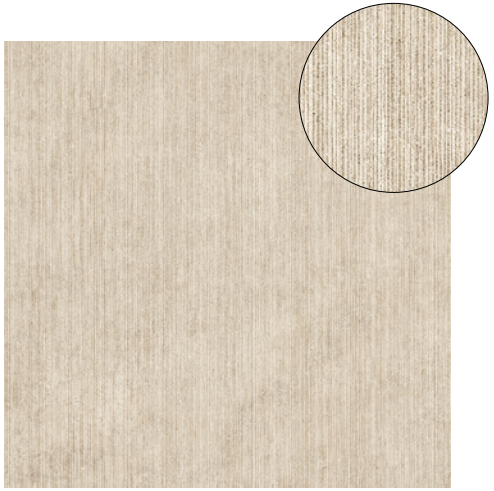

DGTC 02 D-Line Décor

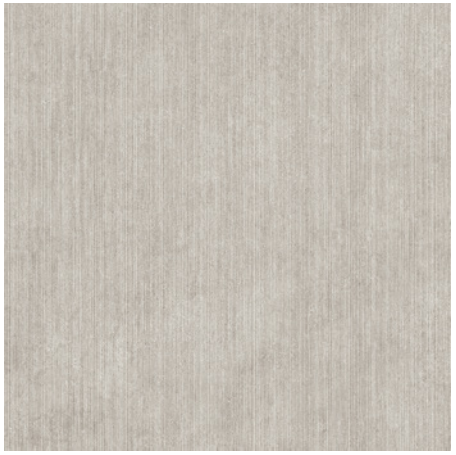

DGTC 03 D-Line Décor

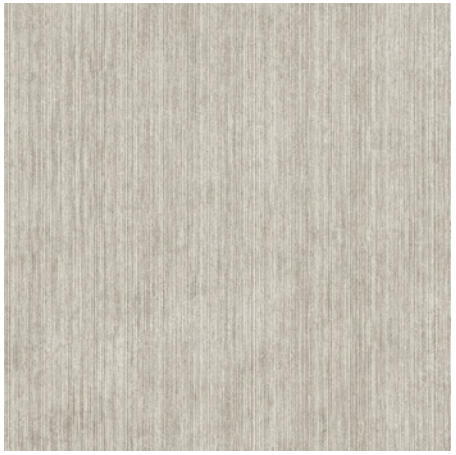

DGTC 04 D-Line Décor

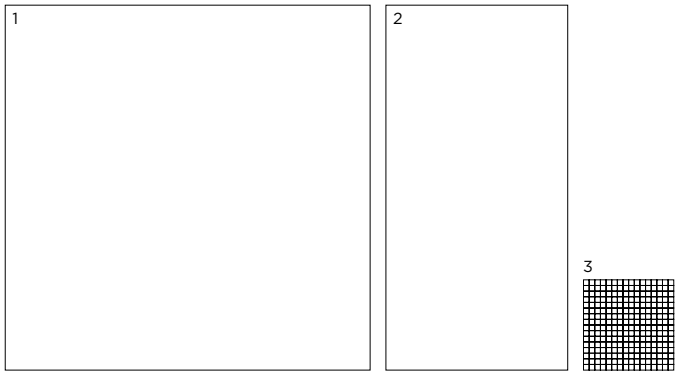

	Size (mm)	Thickness	Finish	Colour Availability
1	D-Line Décor 1190 x 1190 (R)	9	Matt	All colours
2	D-Line Décor 1190 x 594 (R)	9	Matt	All colours
3	Mosaic 15 x 15 on 296 x 296 sheet	9	Matt	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.

V2 – Moderate Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

V2 – Moderate Shade Variation

DGTC 01 Matt

DGTC 02 Matt

DGTC 01 Soft

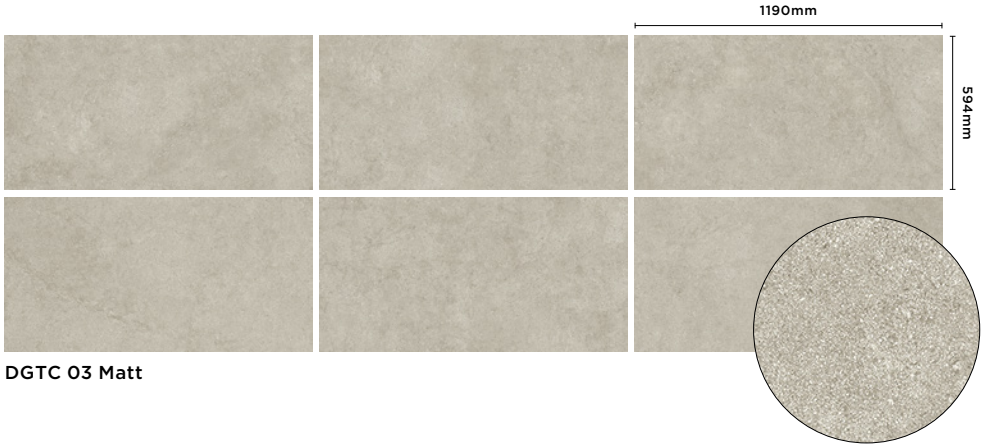

DGTC 03 Matt

DGTC 01 Outdoor

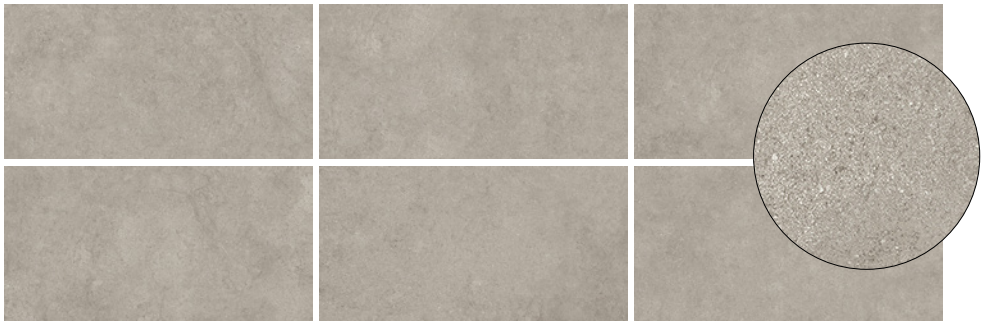

DGTC 04 Matt

Tuscany

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)
Use: Floors & Walls
Product Code: DGTC

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 (Annex B)	R9 from 3° to 10° R10 from 10° to 19° R11 from 19° to 27°	Soft Matt Outdoor
Areas with bare feet	BS EN 16165 (Annex A)	B over 18° to 24° C over 24°	Matt Outdoor
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165 (Annex C)	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.1% (Average Value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm^2	≥ 40 N/mm^2 (Average Value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	> 2100 N (Average Value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm^3	≤ 145 mm^3 (Average Value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 7 x 10^{-6} °C^{-1} (Average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	Resistant
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Resistant
Reaction to fire	Based on the decision 96/603/EC and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1
Recycled content			41%

ISO 9001 2015 ISO 14001 2015 RECYCLED CONTENT EPD®

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
February 2026

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com