Cementine Dintorni

Porcelain Design

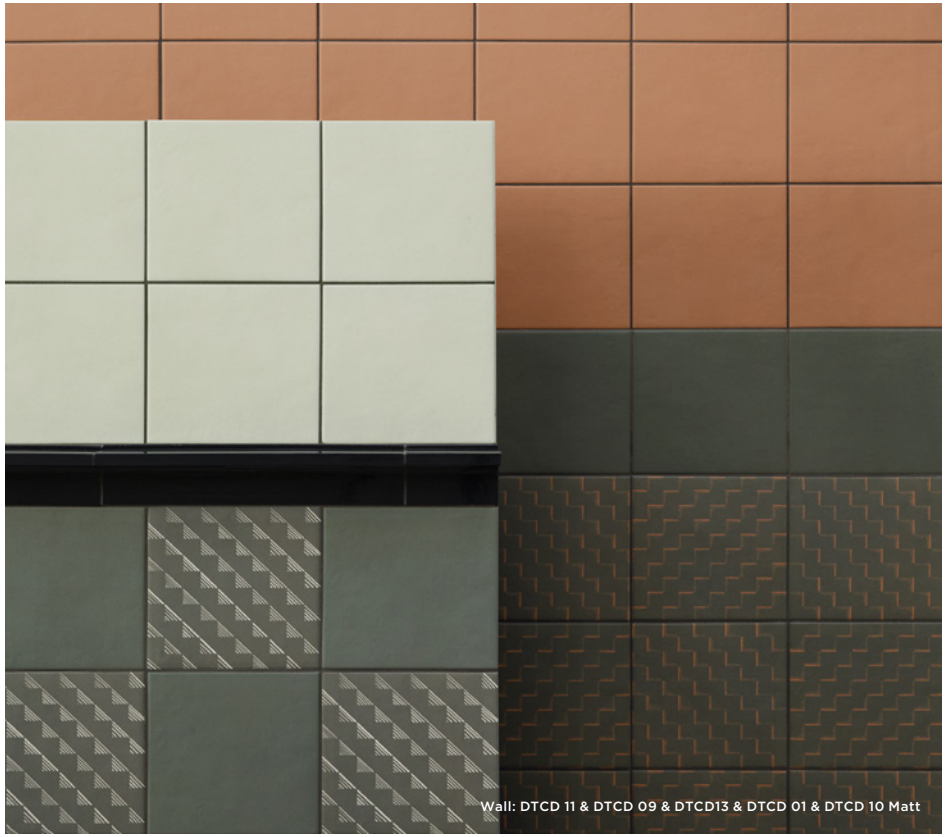

Wall: DTCD 11 & DTCD 09 & DTCD13 & DTCD 01 & DTCD 10 Matt

14 Colours / **1** Finish / **1** Size / **1** Décor

Dintorni is the new collection by Inga Sempé designed around the iconic 20x20cm format. The name Dintorni, meaning “surroundings,” evokes everything that lies beyond the known and the endless potential for discovery and surprise.

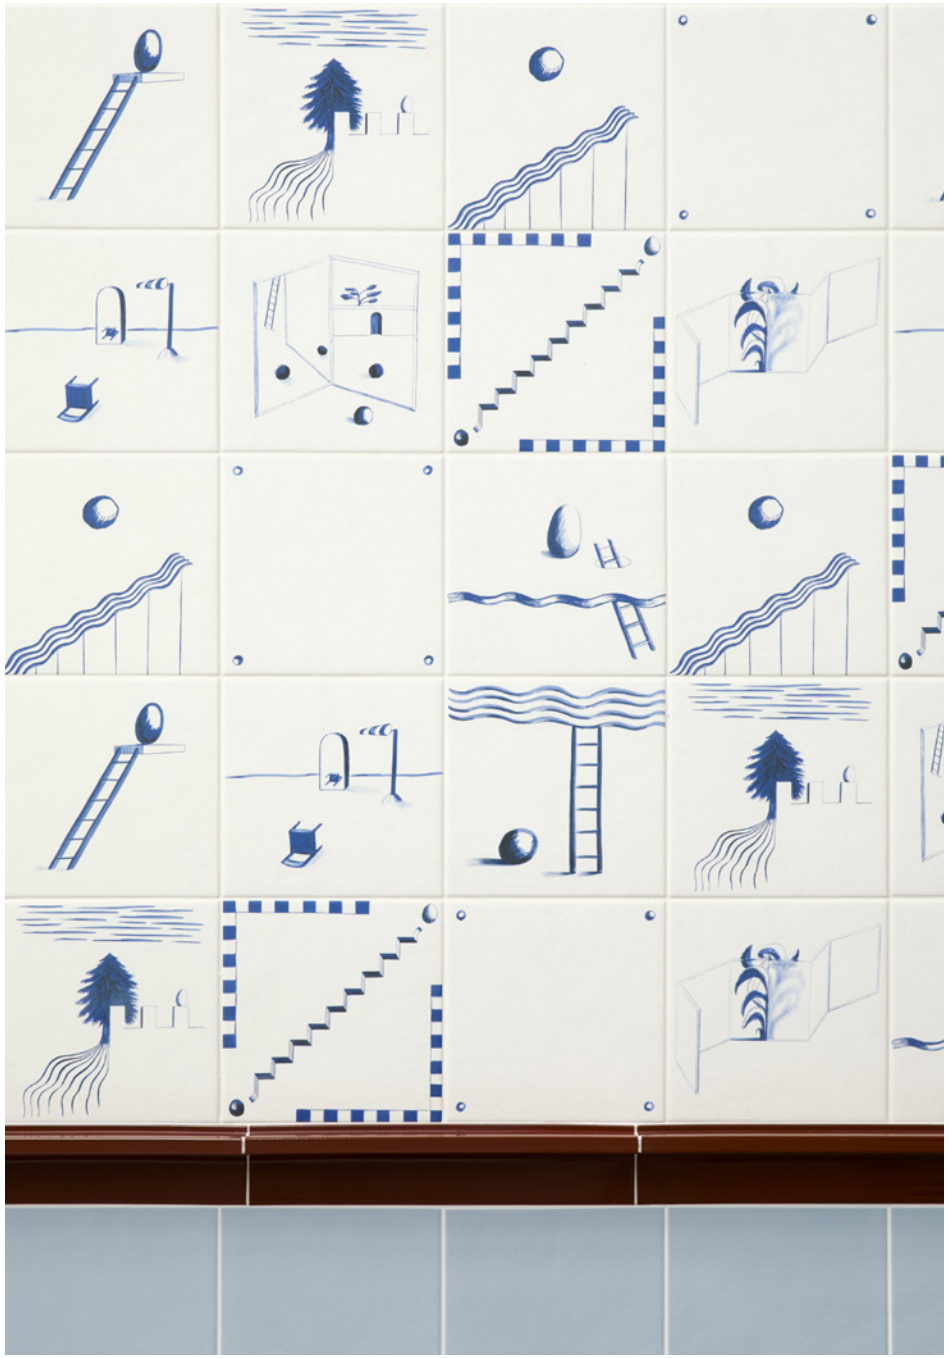

Wall:DTCD 05 & DTCD 99 Décor Matt

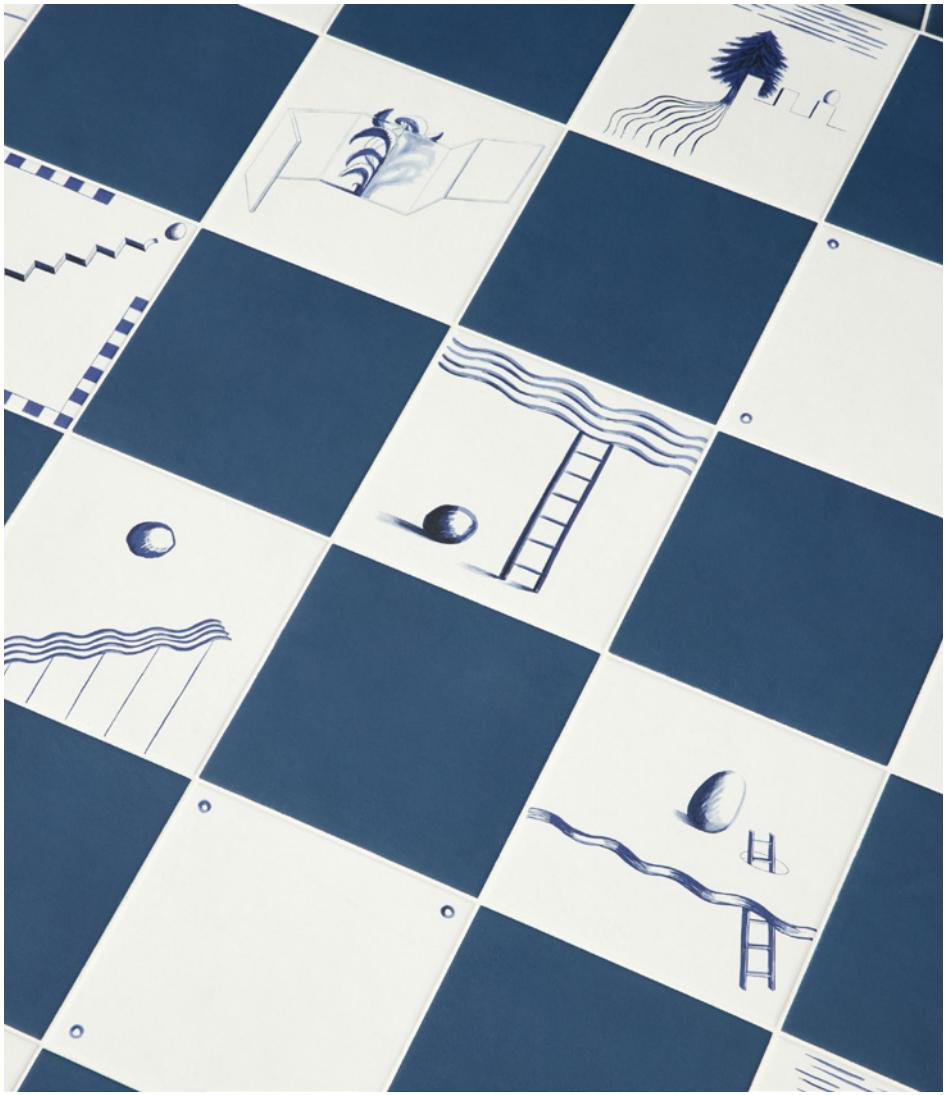

Wall: DTCD 14 & DTCD 99 Décor Matt

DTCD 03

DTCD 07

DTCD 11

DTCD 02


DTCD 06


DTCD 10


DTCD 04


DTCD 08


DTCD 12

DTCD 01

DTCD 05

DTCD 09

DTCD 13

DTCD 14

Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	205 x 205 (N)	9.5	Matt	All Colours

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested. Recommeded for use on internal walls only.

V2 – Moderate Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Décor

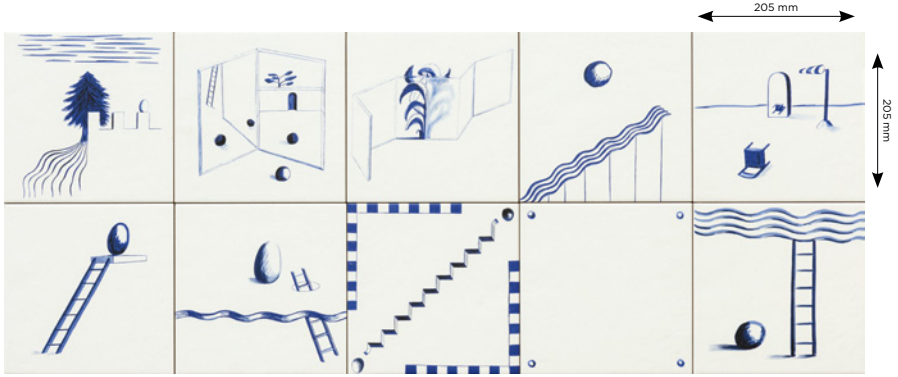

DTCD 99 Décor

1				

	Size (mm)	Thickness	Finish	Colour Availability
1	205 x 205 (N)	9.5	Matt	DTCD 99 Décor

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested.

V2 – Moderate
Shade Variation

DOMUS
service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Special Pieces

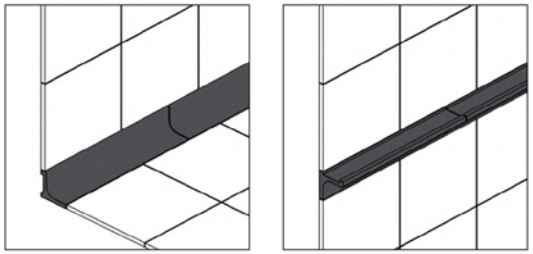

Raccordo nero

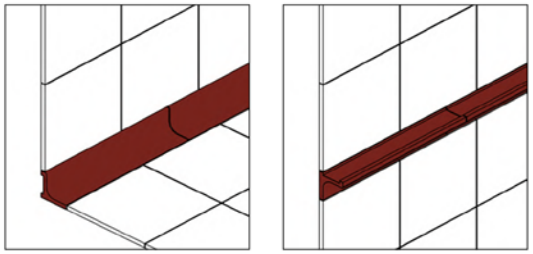

Raccordo caramel

Wall: Raccordo Piece (Nero), DTCD 01 & DTCD 09 & DTCD10 & DTCD 12 Matt

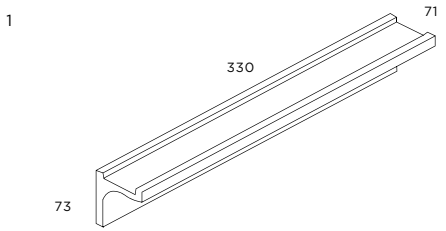

	Size (mm)	Thickness	Finish	Colour Availability
1	73 x 330mm	71	Matt	Caramel & Nero

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested. Recommeded for use on internal walls only.

V2 – Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Cementine Dintorni

Technical Data

Product Code: DTCD

Please be aware that this tile is produced in two calibres, which vary slightly from the nominal size, details below.

Calibre 0: 202.1 x 202.1 mm to 203.5 x 203.5 mm **Calibre 1:** 203.6 x 203.6 mm to 205 x 205 mm

Where there is a requirement for a specific calibre, please ensure this is quoted on all correspondence. Where a specific calibre is not requested, a random calibre will be assigned to all orders. Please ensure all tiles from the same calibre are used within the same project.

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 (Annex B)	R11 from 19° to 27°	Matt
Areas with bare feet	BS EN 16165 (Annex A)	C over 24°	Matt
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165 (Annex C)	Test results upon request	

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

May 2026

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.07% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *See classifications below	Class 3 – DTCD 09, 10, 11, 12 & 14 Class 4 – DTCD 01, 02, 03, 04, 05, 06, 07, 08 & 13
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	$A1_{FL}$/A1	$A1_{FL}$/A1
Recycled content			20%

***PEI classifications**
PEI 1 – Very light traffic
PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic

ISO 9001 2015 ISO 14001 2015 RECYCLED CONTENT EMAS EPD®

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com