

# Eternal 55

*Engineered Vinyl*



**20 Colours / 1 Finish / 2 Sizes**

Eternal 55 is a range of highly textured vinyl planks suitable for domestic and commercial areas. Available in dryback and rigid acoustic options, the latter comprising a revolutionary rigid board that provides dimensional stability and excellent impact sound absorption.







Floor: EVET 5515 Matt



Floor: EVET 5517 Matt



EVET 5508



EVET 5503



EVET 5514



EVET 5515



EVET 5509



EVET 5513



EVET 5510



EVET 5502



EVET 5504



EVET 5506



EVET 5516




EVET 5517



EVET 5505



EVET 5511




EVET 5507




EVET 5512




EVET 5518



EVET 5501




EVET 5519



EVET 5520

# Sizes

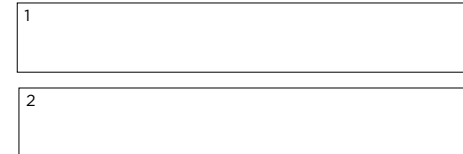

	Size (mm)	Thickness	Finish	Colour Availability
1	Dryback 184.1 x 1219.2	2.5	Matt	All colours
2	Rigid Acoustic Click 180 x 1210	6	Matt	All colours

Swatch colours may vary from original. Samples should be requested.

## Specification

- Format:** Plank
- Treatment:** PUR Ecoprotect™
- Texture:** Registered Embossed
- Edge Detail:** 4-way bevel
- Sustainability:** 100% phthalate-free. Low VOC. 100% recyclable
- Durability:**
  - Class 23 Domestic
  - Class 33 Commercial
  - Class 42 Industrial
- Application:** Internal use only. Suitable with underfloor heating
- Installation:**
  - Click I4F (Rigid Acoustic Click)
  - Recommended for bonded installation (Dryback)
  - Recommended for floated installation (Rigid Acoustic Click)

# Eternal 55

## Technical Data

### PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Product Standard	EN ISO 10582	Heterogeneous resilient floor covering
Total Thickness	EN ISO 24346	2.5mm (Dryback) 6.0mm (Rigid Acoustic)
Wear Layer Thickness	EN ISO 24340	0.55mm
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Total Weight	EN ISO 23997	4.750g/m <sup>2</sup> (Dryback) 10.000g/m <sup>2</sup> (Rigid Acoustic)
Wear Layer Binder Content	EN 10582	Type I
Abrasion Group	EN 660-2	Group T: ≤ 2.00mm <sup>3</sup>
Packing	EN ISO 24342	20 planks/box = 4.49m <sup>2</sup> (Dryback) 40 boxes/pallet = 179.60m <sup>2</sup> (Dryback) 10 planks/box = 2.18m <sup>2</sup> (Rigid Acoustic) 40 boxes/pallet = 87.20m <sup>2</sup> (Rigid Acoustic)
Surface Treatment		PUR Ecoprotec™
Locking System		N/A (Dryback) Click I4F (Rigid Acoustic)
TVOC After 28 days Indoor Air Quality	ISO 16000-9	≤ 100µg/m <sup>3</sup> (AgBB test)
VOC Emission Class	ISO 16000-9	A+ (French Regulation)
Floorscore VOC Test Indoor Air Quality	ISO 16000-9	Passed
Plasticizer		Phthalate-free
Formaldehyde Group	EN 717-1	E1
Recyclability		100%

### PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Dimensional Stability	EN ISO 23999	≤ 0.10% (Dryback) ≤ 0.06% (Rigid Acoustic)
Castor Chair	ISO 4918	No damage
Furniture Leg	EN ISO 16581	No damage
Squareness & Straightness	EN ISO 24342	≤ 0.25mm
Residual Indentation	EN ISO 24343-1	≤ 0.10mm
Impact Sound Reduction	EN ISO 717-2	ΔLw = 6dB (Dryback) ΔLw = 22dB (Rigid Acoustic)
Light Fastness	EN ISO 105-B02	≥ 6
Slip Resistance	DIN 51130 EN 13893	R10 DS
Resistance to Chemicals	EN ISO 26987	Not affected (0)
Thermal Resistance	EN ISO 10456	0.02m <sup>2</sup> K/W (Dryback) 0.04m <sup>2</sup> K/W (Rigid Acoustic)
Curl after exposure to heat	EN ISO 23999	≤ 2mm
Fire Resistance	EN 13501-1	Bfl-s1
Electrical Properties	EN 1815	≤ 2kV
Resistance Against Staining	EN 26987	Passed
Underfloor Heating Suitability	EN 12524	Compatible (max. 27°C)
Residential Warranty		25 years
Commercial Warranty		10 years

Compatible with underfloor heating systems subject to M50 installation advice available on request.

Test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Ltd. cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Please refer to Domus Group Ltd. Terms & Conditions of Sale, January 2024.



**DOMUS**

service@domusgroup.com | t: 020 8481 9567 | domusgroup.com