

Limestone

Porcelain Stone



Floor: DCLM 02 Honed

4 Colours / 3 Finishes / 4 Sizes

Limestone is the epitome of high-quality porcelain stoneware. Produced with cutting-edge ink-jet ceramic technology, its level of detail and tonal variation is exceptional. It is 40% recycled and has a BRE Green Guide A rating.



Wall & Floor: DCLM 04 Natural



DCLM 01



DCLM 02




DCLM 03



DCLM 04

Sizes

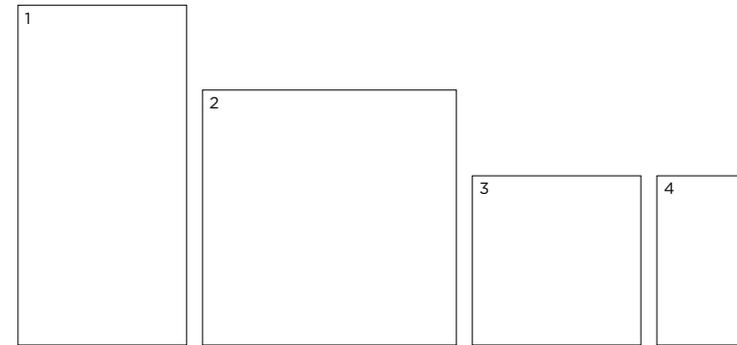


	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 598 (R)	14	Natural Honed Bush Hammered	All colours All colours All colours
2	895 x 895 (R)	14	Natural Honed	All colours All colours
3	598 x 598 (R)	14	Natural Honed Bush Hammered	All colours All colours All colours
4	598 x 298 (R)	14	Natural Honed Bush Hammered	All colours All colours All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Special pieces shown on next page.



Floor: DCLM 01 Natural

Special Pieces

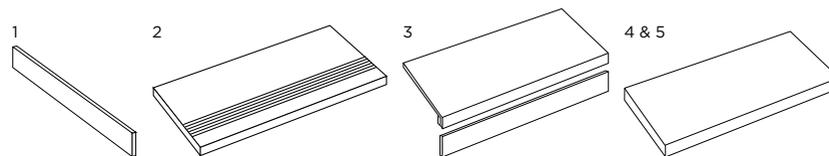

	Size (mm)	Thickness	Finish	Colour Availability
1	Bevelled Edge Skirting 895 x 72	14	Natural Honed	All colours All colours
2	Grooved Step Tread 1198 x 340	14	Natural Bush Hammered Honed	All colours All colours All colours
3	Straight-Edge Step Tread Plus 1198 x 340	14	Natural Bush Hammered	All colours All colours
4	Angle Step Tread (Left) 1198 x 340	14	Natural	All colours
5	Angle Step Tread (Right) 1198 x 340	14	Natural	All colours

Swatch colours may vary from original. Samples should be requested.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Limestone

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 - Group Bla)

Use: Floors & Walls

Product Code: DCLM

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Natural Bush Hammered
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Natural Bush Hammered
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.05% (typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	6080 N (typical value)
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175 mm ³	143 mm ³ (typical value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 7 x 10 ⁻⁶ / °C ⁻¹ (typical value)
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			≥ 40%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2019



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com