

Unique Marble

Porcelain Marble



5 Colours / 2 Finishes / 2 Sizes / 2 Mosaics

Unique Marble brings together five of the world's most exclusive marbles and reinterprets them as a complete, original range of porcelain tiles in a contemporary style. Characteristics of this range include timeless elegance, strong personality, expressive power, intensity and sophistication.





Floor: DPUM 02 Silktech



Floor: DPUM 01 Full Lappato


Sizes



DPUM 01




DPUM 02

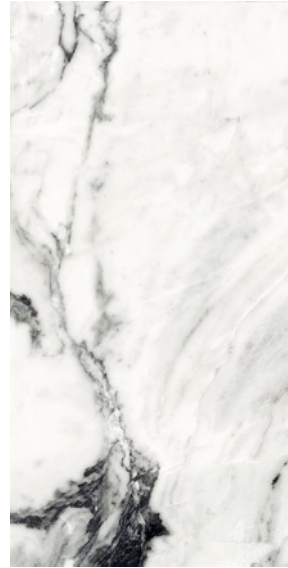


DPUM 03



DPUM 04

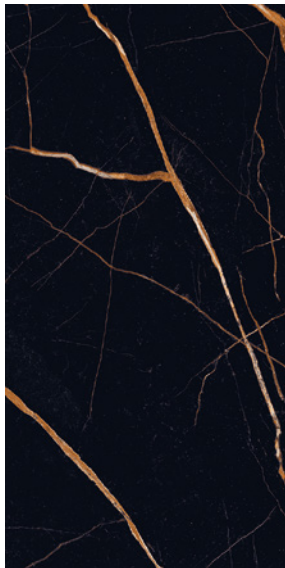


DPUM 05

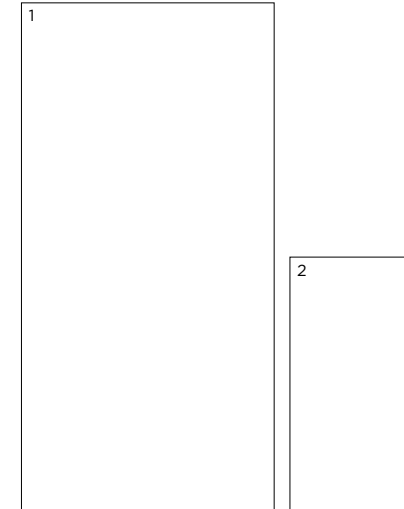

	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 598 (R)	9.5	Full Lappato	All colours
			Silktech	All colours
2	598 x 298 (R)	9.5	Full Lappato	DPUM 04 & 05
			Silktech	DPUM 01, 03, 04 & 05

(R) Rectified size - square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.




Mosaic 28 x 28mm




DPUM 01 Mosaic




DPUM 02 Mosaic



DPUM 03 Mosaic



DPUM 04 Mosaic



DPUM 05 Mosaic

Arrows Mosaic




DPUM 01 Arrows Mosaic




DPUM 02 Arrows Mosaic



DPUM 03 Arrows Mosaic




DPUM 04 Arrows Mosaic




DPUM 05 Arrows Mosaic

Mosaics & Special Pieces

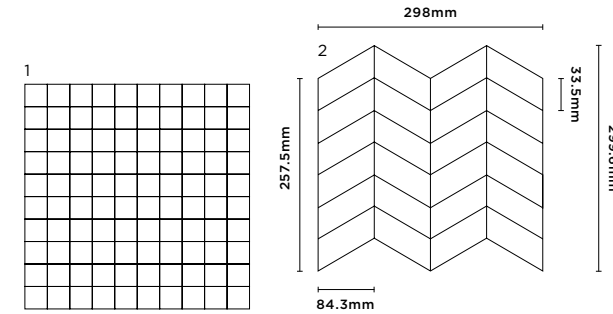

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 28 x 28 (R) on 298 x 298 sheet	9.5	Full Lappato Silktech	All colours All colours
2	Arrows Mosaic 84.3 x 33.5 (R) on 298 x 257.5 sheet	9.5	Full Lappato Silktech	All colours All colours
	Plinth Skirting 598 x 73	9.5	Full Lappato Silktech	All colours All colours
	Bullnose Step Tread 1198 x 330 x 32 x 32	9.5	Full Lappato Silktech	All colours All colours
	Angle Step Tread DX/SX 1198 x 330 x 32 x 32	9.5	Full Lappato Silktech	All colours All colours


(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


V3 - High Shade Variation

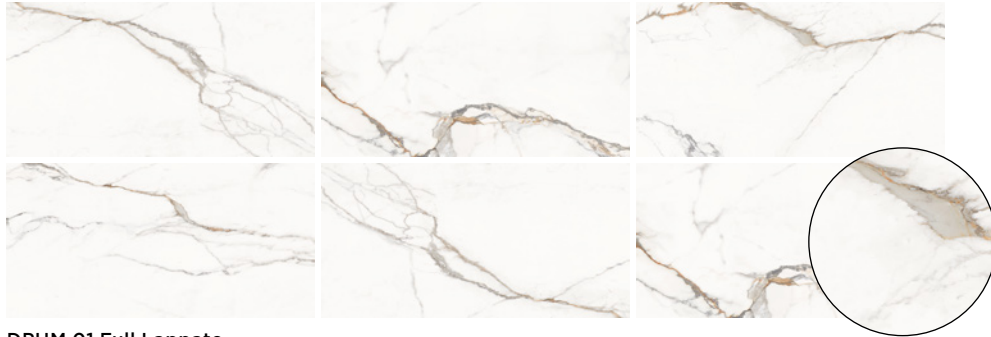


DPUM 01 Full Lappato




DPUM 02 Silktech

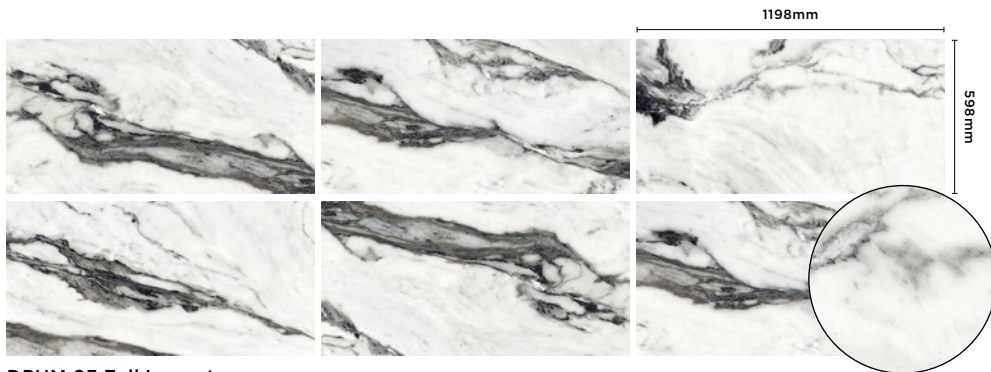

DPUM 03 Full Lappato

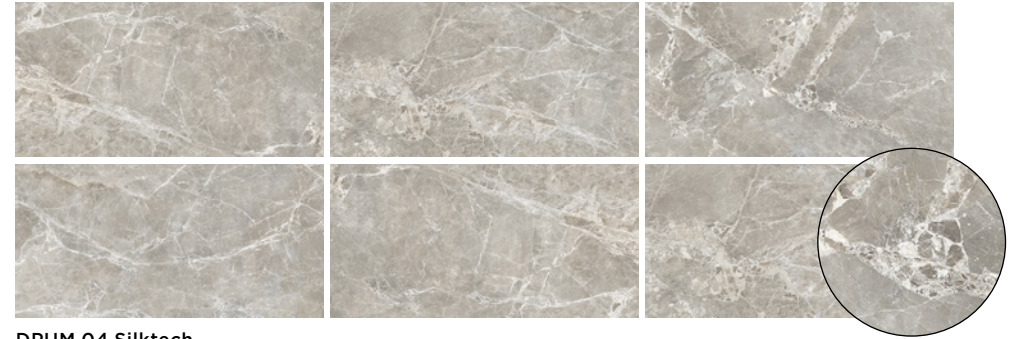

DPUM 04 Silktech

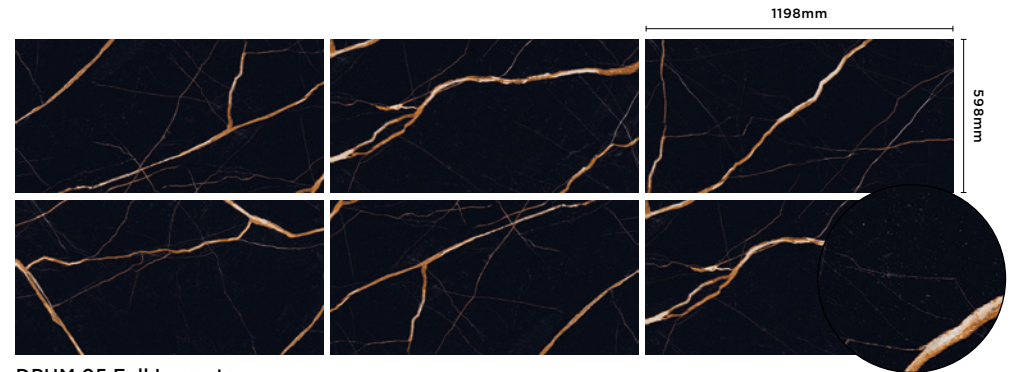

DPUM 05 Full Lappato



Floor: DPUM 05 Full Lappato

Unique Marble

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DPUM

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Silktech (available in 298x598 & 1198x598 sizes)
Areas with bare feet	DIN 51097	B over 18° to 24°	Silktech (available in 298x598 & 1198x598 sizes)
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45 N/mm ² (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	≥ 2000 N (typical value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4 – DPUM 04 & 05 Class 5 – DPUM 01, 02 & 03
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9x10 ⁻⁶ /°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			0%

***PEI classifications**
 PEI 1 – Very light traffic
 PEI 2 – Light traffic
 PEI 3 – Light to moderate traffic
 PEI 4 – Moderate to heavy traffic
 PEI 5 – Heavy to extra heavy traffic

