

# Origin Wall

*Ceramic Design*

Back & Return Wall: DACW 02 Matt  
Right Wall: DAGW 02 Line Décor Matt




5 Colours / 1 Finish / 1 Size / 1 Décor

Origin Wall results from innovation and functionality, uniting advanced technology and versatility. This range's neutral colour schemes & monochromatic look allow it to take centre stage in any space. Origin Wall is treated with antibacterial properties to avoid the spread of bacteria and eliminate any that might appear.

Feature Wall: DACW 01 Line Décor Matt  
Right Wall: DACW 01 Matt



# Sizes

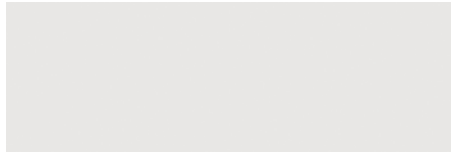


DACW 01



DACW 01 Line Décor



DACW 02

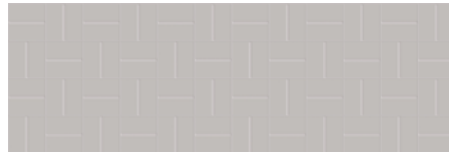

DACW 02 Line Décor



DACW 03



DACW 03 Line Décor



DACW 04



DACW 04 Line Décor



DACW 05



DACW 05 Line Décor



	Size (mm)	Thickness	Finish	Colour Availability
1	900 x 300 (R)	8.7	Matt	All colours
	Line Décor 900 x 300 (R)	10.8	Matt	All colours

(R) Rectified size - square edge with bevel. For wall use only.  
Swatch colours may vary from original. Samples should be requested.

# Origin Wall

Technical Data

**Product Type:** Glazed Ceramic (BS EN 14411 – Group BIII)

**Use:** Walls (Internal only)

**Product Code:** DACW

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 12 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 600 N	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	Conforms
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Conforms
Reaction to fire	Based on the decision 96/603/EC and its changes		A1
Antibacterial efficacy	JIS Z 2801:2010		≥ 99
Recycled content			29%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Feb 2022

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com