

# Gubi

*Porcelain Stone*



**4** Colours / **2** Finishes / **7** Sizes / **4** Mosaics

Gubi combines timelessness and trend with a sober style that can create minimalist environments. This porcelain range is inspired by the typical micro-cement polishing and is smooth to the touch, combining an elegant design with high functionality. It can be paired with Gubi Wall, Gubi Slim and Gubi Wall Slim.



# Sizes



DLGF 05




DLGF 01



DLGF 02



DLGF 06

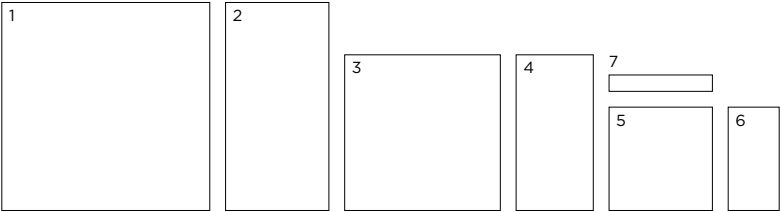


|   | Size (mm)       | Thickness | Finish                  | Colour Availability |
|---|-----------------|-----------|-------------------------|---------------------|
| 1 | 1198 x 1198 (R) | 9         | Natural                 | All colours         |
|   |                 |           | Bush Hammered Anti-Slip | All colours         |
| 2 | 1198 x 598 (R)  | 9         | Natural                 | All colours         |
|   |                 |           | Bush Hammered Anti-Slip | All colours         |
| 3 | 898 x 898 (R)   | 9         | Natural                 | All colours         |
|   |                 |           | Bush Hammered Anti-Slip | All colours         |
| 4 | 898 x 448 (R)   | 9         | Natural                 | All colours         |
|   |                 |           | Bush Hammered Anti-Slip | All colours         |
| 5 | 598 x 598 (R)   | 9         | Natural                 | All colours         |
|   |                 |           | Bush Hammered Anti-Slip | All colours         |
| 6 | 598 x 298 (R)   | 9         | Natural                 | All colours         |
|   |                 |           | Bush Hammered Anti-Slip | All colours         |
| 7 | 598 x 98 (R)    | 9         | Natural                 | All colours         |
|   |                 |           | Bush Hammered Anti-Slip | All colours         |

(R) Rectified size – squared edge with bevel. Mosaics shown on next page. Swatch colours may vary from original. Samples should be requested.

# Mosaics


Mosaic 25 x 25mm




DLGF 05



DLGF 01



DLGF 06



DLGF 02

Mosaic 50 x 50mm



DLGF 05



DLGF 01




DLGF 06



DLGF 02

Mosaic 150 x 30mm



DLGF 05



DLGF 01



DLGF 06



DLGF 02

Muretto Mosaic



DLGF 05




DLGF 01



DLGF 06



DLGF 02

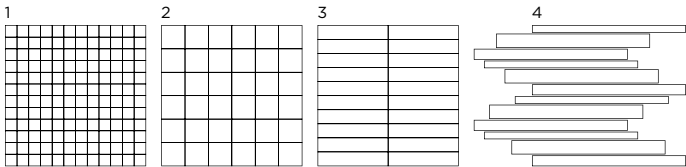

|   | Size (mm)                             | Thickness | Finish                             | Colour Availability        |
|---|---------------------------------------|-----------|------------------------------------|----------------------------|
| 1 | Mosaic 25 x 25<br>on 298 x 298 sheet  | 9         | Natural<br>Bush Hammered Anti-Slip | All colours<br>All colours |
| 2 | Mosaic 50 x 50<br>on 298 x 298 sheet  | 9         | Natural<br>Bush Hammered Anti-Slip | All colours<br>All colours |
| 3 | Mosaic 150 x 30<br>on 298 x 298 sheet | 9         | Natural<br>Bush Hammered Anti-Slip | All colours<br>All colours |
| 4 | Muretto Mosaic<br>on 298 x 298 sheet  | 9         | Natural<br>Bush Hammered Anti-Slip | All colours<br>All colours |

Swatch colours may vary from original. Samples should be requested. Special pieces shown on next page.

V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com





Wall: DLGF 01 Natural & DLGF 01 Mosaic Natural

## Special Pieces

|   | Size (mm)                           | Thickness | Finish                  | Colour Availability |
|---|-------------------------------------|-----------|-------------------------|---------------------|
| 1 | Skirting<br>1198 x 48               | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |
| 2 | Skirting<br>898 x 48                | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |
| 3 | Skirting<br>598 x 48                | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |
| 4 | Step Tread<br>1198 x 333 x 30       | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |
| 5 | Step Tread<br>898 x 333 x 30        | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |
| 6 | Step Tread<br>598 x 333 x 30        | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |
| 7 | Angle Step Tread<br>1198 x 333 x 30 | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |
| 8 | Angle Step Tread<br>898 x 333 x 30  | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |
| 9 | Angle Step Tread<br>598 x 333 x 30  | 9         | Natural                 | All colours         |
|   |                                     |           | Bush Hammered Anti-Slip | All colours         |

Swatch colours may vary from original. Samples should be requested.

V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Gubi

Technical Data

Product Type: **Glazed Porcelain (BS EN 14411 – Group Bla)**

Use: **Floors & Walls**

Product Code: **DLGF**

DIMENSION & SURFACE QUALITY

| Technical Characteristics  | Industry Standards | Requirement            | Actual Value |
|----------------------------|--------------------|------------------------|--------------|
| Length & width             | BS EN ISO 10545-2  | ± 0.60% (max. ± 2.0mm) | Conforms     |
| Thickness                  | BS EN ISO 10545-2  | ± 5% (max. ± 0.5mm)    | Conforms     |
| Edge straightness          | BS EN ISO 10545-2  | ± 0.50% (max. ± 1.5mm) | Conforms     |
| Orthogonality (squareness) | BS EN ISO 10545-2  | ± 0.50% (max. ± 2.0mm) | Conforms     |
| Planarity (flatness)       | BS EN ISO 10545-2  | ± 0.50% (max. ± 2.0mm) | Conforms     |
| Appearance                 | BS EN ISO 10545-2  | > 95%                  | Conforms     |

SLIP RESISTANCE

| Technical Characteristics                  | Industry Standards             | Requirement                              | Finish                                |
|--------------------------------------------|--------------------------------|------------------------------------------|---------------------------------------|
| Areas with footwear                        | BS EN ISO 10545-17 (DIN 51130) | R9 from 3° to 10°<br>R11 from 19° to 27° | Natural<br>Bush Hammered Natural Grip |
| Areas with bare feet                       | DIN 51097                      | A over 12° to 18°<br>C over 24°          | Natural<br>Bush Hammered Natural Grip |
| Slip resistance<br>Coefficient of friction | BS 7976-2                      | Test results upon request                |                                       |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics                                                                                                 | Industry Standards                                    | Requirement                      | Actual Value         |
|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------------------------------|----------------------|
| Water absorption                                                                                                          | BS EN ISO 10545-3                                     | ≤ 0.5%                           | Conforms             |
| Modulus of rupture (bending strength)                                                                                     | BS EN ISO 10545-4                                     | ≥ 35 N/mm²                       | Conforms             |
| Breaking strength                                                                                                         | BS EN ISO 10545-4                                     | ≥ 1300 N                         | Conforms             |
| Resistance to surface abrasion                                                                                            | BS EN ISO 10545-7                                     | PEI<br>*See classification below | Class 3              |
| Thermal shock resistance                                                                                                  | BS EN ISO 10545-9                                     | No visible defects               | Resistant            |
| Crazing resistance                                                                                                        | BS EN ISO 10545-11                                    | No visible signs                 | Resistant            |
| Frost resistance                                                                                                          | BS EN ISO 10545-12                                    | No surface alteration            | Resistant            |
| Chemical resistance:<br>Low concentrations of acids & alkalis<br><br>Domestic chemicals & additives<br>for swimming pools | BS EN ISO 10545-13                                    | No visible defects               | GLA                  |
|                                                                                                                           | BS EN ISO 10545-13                                    | GB min.                          | GA                   |
| Stain resistance                                                                                                          | BS EN ISO 10545-14                                    | Min. Class 3                     | Class 5              |
| Reaction to fire                                                                                                          | Based on the decision<br>96/603/EC<br>and its changes | A1 <sub>FL</sub> /A1             | A1 <sub>FL</sub> /A1 |
| Recycled content                                                                                                          |                                                       |                                  | 30%                  |

\* PEI classifications

PEI 2 – Light traffic  
PEI 3 – Light to moderate traffic  
PEI 4 – Moderate to heavy traffic  
PEI 5 – Heavy to extra heavy traffic

