

# Heritage Luxe Magnum

*Lightweight Slabs / Porcelain Marble*



Wall: DMAG 239 Glossy

**6 Colours / 3 Finishes / 5 Sizes / 3 Mosaics**

Inspired by the noble hues and majestic veining of marble, Heritage Luxe Magnum rediscovers the artistic heritage of inestimable cultural value we are now privileged to inherit. This lightweight porcelain slab range exhibits similarities to ancient-European palaces, sculptures, and monuments created from coloured marble.



Wall: DMAG 238 Glossy






Wall: DMAG 234 & 236 Picket Mosaic Glossy



Wall: DMAG 237 Glossy  
Floor: DMAG 235 Glossy




# Sizes

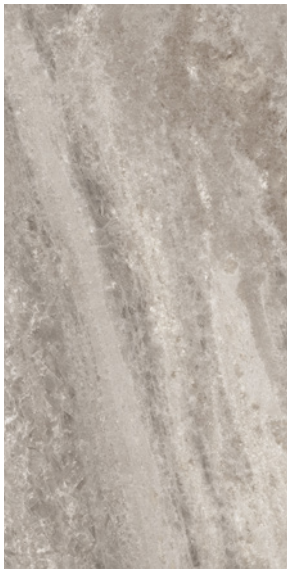

DMAG 234



DMAG 237

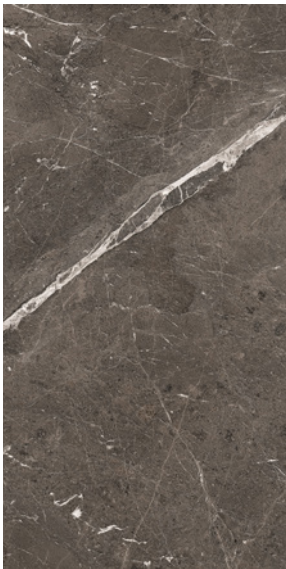


DMAG 235




DMAG 238



DMAG 236

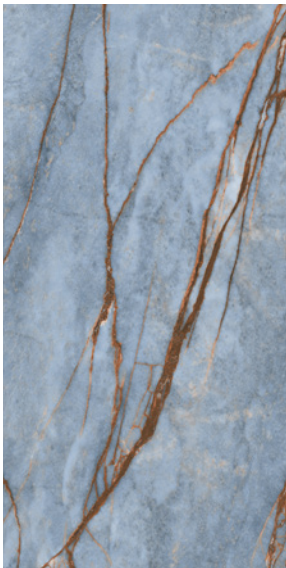

DMAG 239

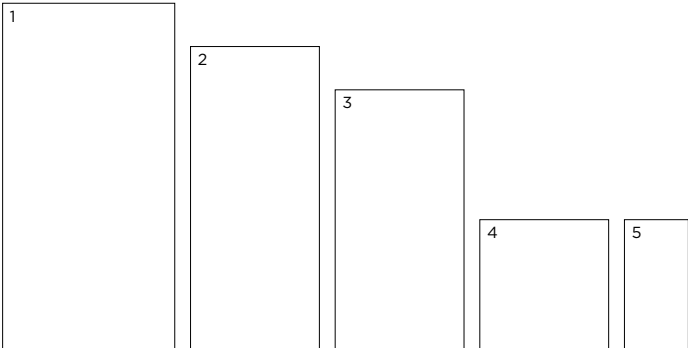

|   | Size (mm)       | Thickness | Finish                | Colour Availability              |
|---|-----------------|-----------|-----------------------|----------------------------------|
| 1 | 3197 x 1597 (R) | 6         | Matt<br>Glossy        | DMAG 238 & 239<br>DMAG 238 & 239 |
| 2 | 2797 x 1197 (R) | 6         | Comfort PTV<br>Glossy | All colours<br>All colours       |
| 3 | 2397 x 1197 (R) | 6         | Comfort PTV<br>Glossy | All colours<br>All colours       |
| 4 | 1197 x 1197 (R) | 6         | Comfort PTV<br>Glossy | All colours<br>All colours       |
| 5 | 1197 x 597 (R)  | 6         | Comfort PTV<br>Glossy | All colours<br>All colours       |


(R) Rectified size – square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.

Maze Mosaic




Mix of DMAG 235, 236 & 237

Trinity Mosaic

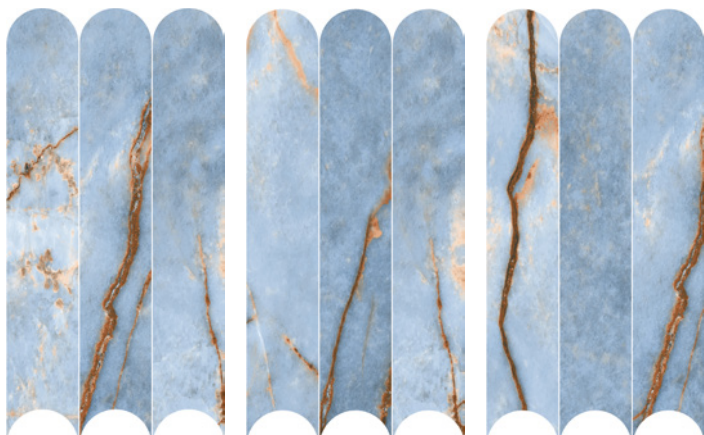


DMAG 239

Picket Mosaic

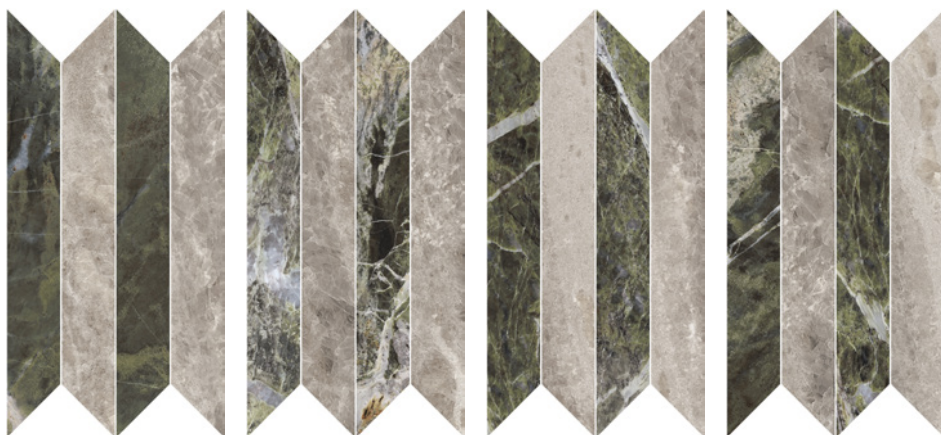


Mix of DMAG 234 & 236

## Mosaics & Special Pieces

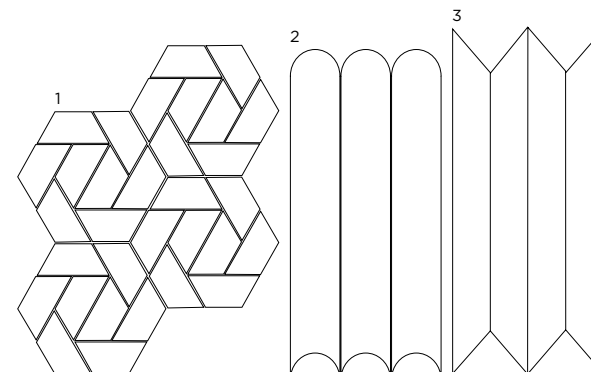

|   | Size (mm)                                | Thickness | Finish                | Colour Availability        |
|---|------------------------------------------|-----------|-----------------------|----------------------------|
| 1 | Maze Mosaic (R)<br>on 487 x 387 sheet    | 6         | Glossy                | Mix of DMAG 235, 236 & 237 |
| 2 | Trinity Mosaic (R)<br>on 597 x 297 sheet | 6         | Glossy                | DMAG 239                   |
| 3 | Picket Mosaic (R)<br>on 597 x 297 sheet  | 6         | Glossy                | Mix of DMAG 234 & 236      |
|   | Plinth Skirting<br>597 x 46              | 6         | Comfort PTV<br>Glossy | All colours<br>All colours |

(R) Rectified size – square edge with bevel. Swatch colours may vary from original.  
Samples should be requested.




**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com




## V2 Moderate - V3 High Shade Variation


---

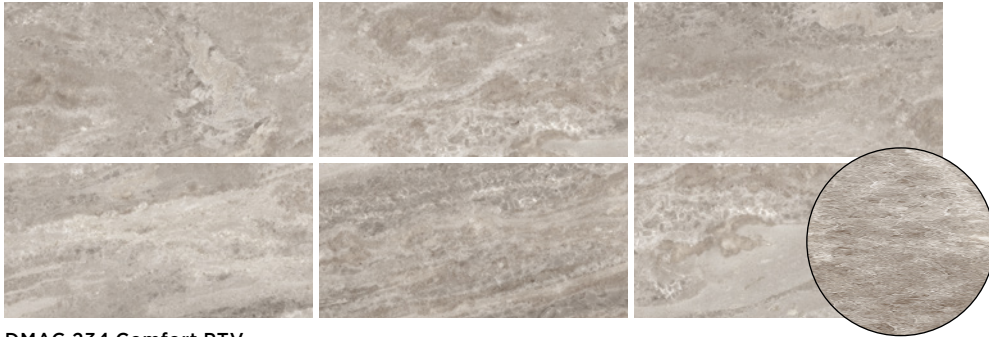

DMAG 234 Comfort PTV

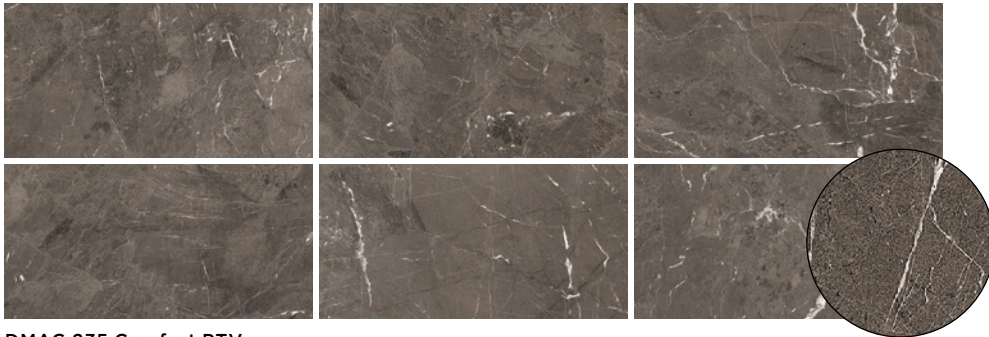


DMAG 235 Comfort PTV

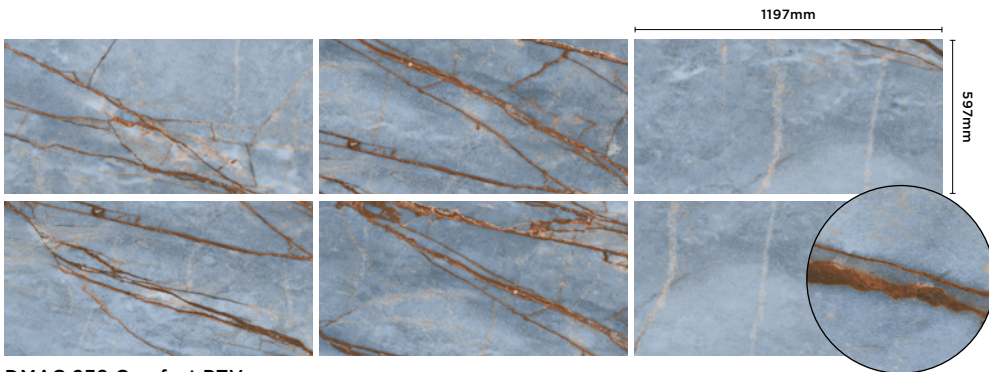


DMAG 239 Comfort PTV

## V4 - Random Shade Variation


---

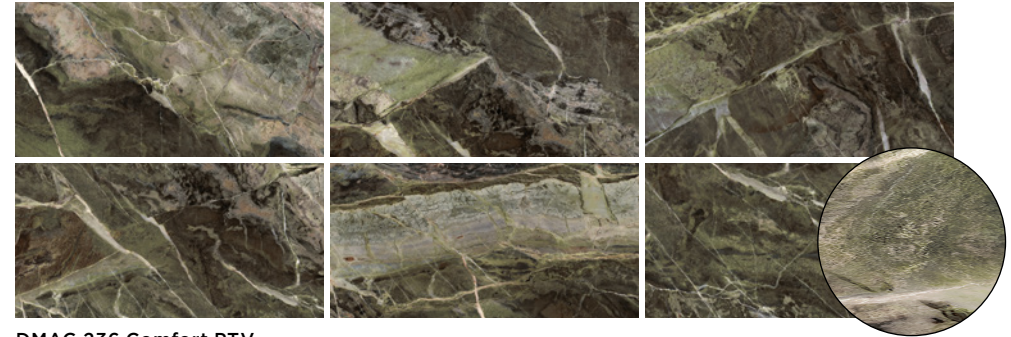

DMAG 236 Comfort PTV

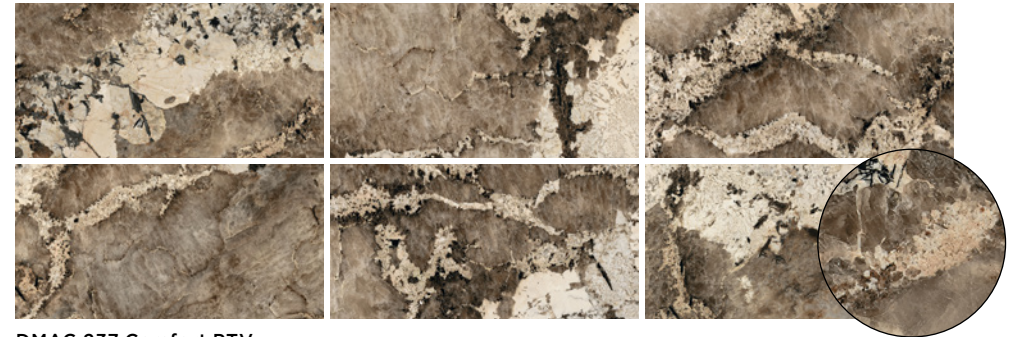

DMAG 237 Comfort PTV

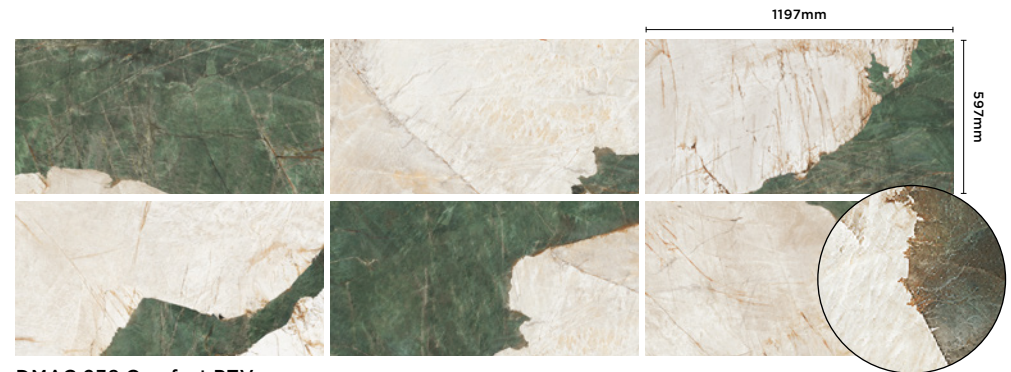

DMAG 238 Comfort PTV

# Heritage Luxe Magnum

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)  
Use: Floors & Walls  
Product Code: DMAG 234 - 239

DIMENSION & SURFACE QUALITY

| Technical Characteristics  | Industry Standards | Requirement            | Actual Value |
|----------------------------|--------------------|------------------------|--------------|
| Length & width             | BS EN ISO 10545-2  | ± 0.60% (max. ± 2.0mm) | Conforms     |
| Thickness                  | BS EN ISO 10545-2  | ± 5% (max. ± 0.5mm)    | Conforms     |
| Edge straightness          | BS EN ISO 10545-2  | ± 0.50% (max. ± 1.5mm) | Conforms     |
| Orthogonality (squareness) | BS EN ISO 10545-2  | ± 0.50% (max. ± 2.0mm) | Conforms     |
| Planarity (flatness)       | BS EN ISO 10545-2  | ± 0.50% (max. ± 2.0mm) | Conforms     |
| Appearance                 | BS EN ISO 10545-2  | > 95%                  | Conforms     |

SLIP RESISTANCE

| Technical Characteristics                  | Industry Standards  | Requirement               | Finish      |
|--------------------------------------------|---------------------|---------------------------|-------------|
| Areas with footwear                        | BS EN 16165 Annex B | R10 from 10° to 19°       | Comfort PTV |
| Areas with bare feet                       | BS EN 16165 Annex A | B over 18° to 24°         | Comfort PTV |
| Slip resistance<br>Coefficient of friction | BS EN 16165         | Test results upon request |             |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics                                     | Industry Standards                              | Requirement               | Actual Value                                |
|---------------------------------------------------------------|-------------------------------------------------|---------------------------|---------------------------------------------|
| Water absorption                                              | BS EN ISO 10545-3                               | ≤ 0.5%                    | 0.08% (typical average value)               |
| Modulus of rupture (bending strength)                         | BS EN ISO 10545-4                               | ≥ 35 N/mm²                | 52 N/mm² (typical average value)            |
| Breaking strength                                             | BS EN ISO 10545-4                               | < 7.5mm ≥ 700 N           | 1350 N (typical average value)              |
| Resistance to deep abrasion (unglazed tiles)                  | BS EN ISO 10545-6                               | ≤ 175 mm³                 | 140 mm³ (typical average value)             |
| Thermal shock resistance                                      | BS EN ISO 10545-9                               | No visible defects        | Resistant                                   |
| Frost resistance                                              | BS EN ISO 10545-12                              | No surface alteration     | Resistant                                   |
| Chemical resistance:<br>Low concentrations of acids & alkalis | BS EN ISO 10545-13                              | No visible defects        | ULA – Comfort PTV<br>ULA-ULB – Glossy       |
| Domestic chemicals & additives for swimming pools             | BS EN ISO 10545-13                              | UB/GB min.                | UA                                          |
| Stain resistance                                              | BS EN ISO 10545-14                              | Declared value - unglazed | Class 4-5 - Glossy<br>Class 5 – Comfort PTV |
| Reaction to fire                                              | Based on the decision 96/603/EC and its changes | A1 <sub>FL</sub> /A1      | A1 <sub>FL</sub> /A1                        |
| Recycled content                                              |                                                 |                           | 20.5%                                       |



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. November 2023