

I Colori Full Body

Porcelain Design



Wall: DCORF 02 Unglazed
Floor: DCORF 08 Unglazed

16 Colours / 1 Finish / 4 Sizes / 4 Mosaics

I Colori Full Body is a colourful range of frost-proof, full-bodied porcelain tiles suitable for use on walls and floors. I Colori Full Body is available in modular sizes and can be combined with I Colori Matt, I Colori Lucido and I Colori Anti-Slip.



Counter: DCORF 11 & 21 Unglazed
Wall & Floor: DCORF 11 Mosaic 50 x 50 Unglazed




Wall: DCORF 03 Unglazed
Floor: DCORF 16 Unglazed



Wall: DCORF 05 & 08 Unglazed
Floor: DCORF 08 Unglazed

Sizes



DCORF 01



DCORF 05




DCORF 11



DCORF 17




DCORF 02



DCORF 08




DCORF 03



DCORF 04




DCORF 19



DCORF 10



DCORF 20



DCORF 18



DCORF 21




DCORF 22



DCORF 14



DCORF 16

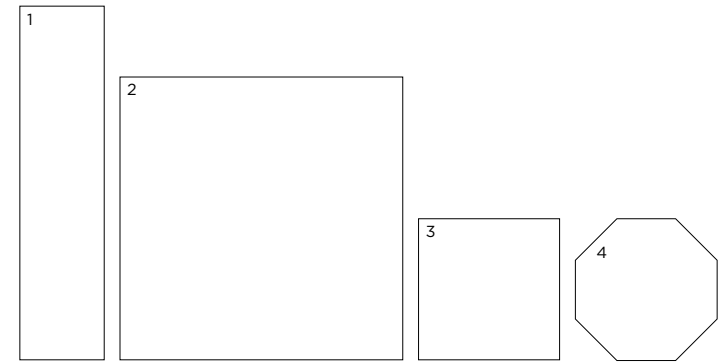


	Size (mm)	Thickness	Finish	Colour Availability
1	250 x 60 (N)	7	Unglazed	DCORF 03-05, 08 & 10
2	200 x 200 (N)	7	Unglazed	DCORF 01-05, 08, 10, 11, 14 & 16
3	100 x 100 (N)	7	Unglazed	All colours
4	Octagon 100 x 100 (N)	7	Unglazed	DCORF 01-05, 08, 10, 11, 14 & 16


(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested. Mosaics shown on next page.

Mosaics


Mosaic 25 x 25mm




DCORF 05



DCORF 02




DCORF 08




DCORF 10


Mosaic 50 x 50mm




DCORF 17



DCORF 18




DCORF 19




DCORF 20


Mosaic 100 x 100mm




DCORF 01



DCORF 11



DCORF 14



DCORF 16


Butterfly Mosaic 50 x 25mm




DCORF 03




DCORF 04



DCORF 14




DCORF 16

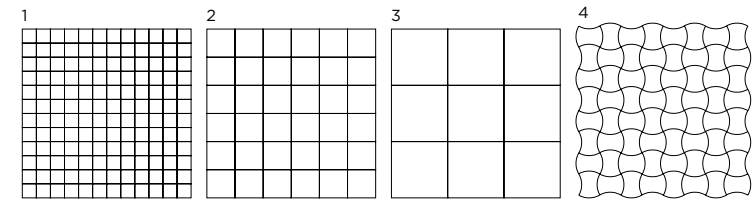

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 25 x 25 (N) on 300 x 300 sheet	4	Unglazed	DCORF 01-05, 08 & 10
2	Mosaic 50 x 50 (N) on 300 x 300 sheet	5.5	Unglazed	All colours
3	Mosaic 100 x 100 (N) on 300 x 300 sheet	7	Unglazed	All colours
4	Butterfly Mosaic 50 x 25 (N) on 300 x 300 sheet	7	Unglazed	DCORF 01-05, 08, 10, 11, 14 & 16

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested.



V2 - Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

I Colori Full Body

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DCORF

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Unglazed
Areas with bare feet	DIN 51097	B over 18° to 24°	Unglazed
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	Conforms
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	6.5x10 ⁻⁶ K ⁻¹ (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed Declared value – unglazed	Class 3
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2022

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com