

Les Bijoux

Porcelain Marble



5 Colours / 1 Finish / 1 Size / 1 Mosaic

The artistic allure of jewel-like surfaces with exceptional style and great expressive strength—Les Bijoux is inspired by extremely rare and precious marbles that can be compared to true works of art. Refer to Les Bijoux Magnum for 6mm-thick lightweight slab options.





Floor: DRBX 02 Glossy




Floor: DRBX 01 Glossy


Sizes




DRBX 02

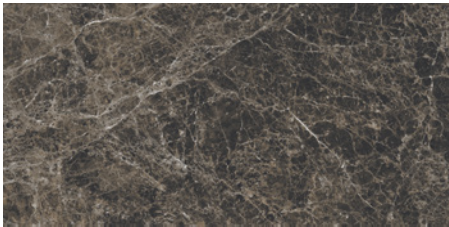

DRBX 04

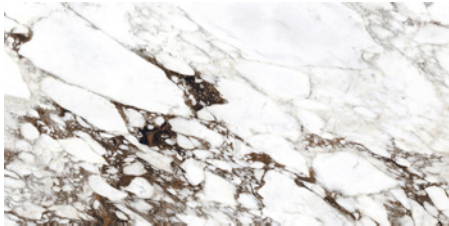


DRBX 01

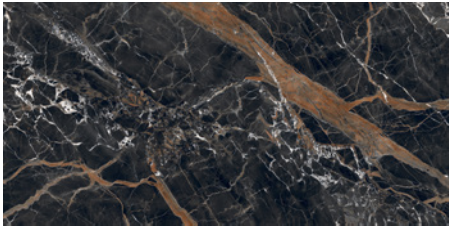

DRBX 05



DRBX 03




	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Glossy	All colours

(R) Rectified size – square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.


Mosaic




DRBX 01




DRBX 02



DRBX 03



DRBX 04



DRBX 05



Floor: DRBX 02 Glossy

Mosaics & Special Pieces

1

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 147 x 27 on 297 x 297 sheet	9	Glossy	All colours
	Plinth Skirting 597 x 46 (R)	9	Glossy	All colours
	Bullnose Step Tread 1197 x 330 x 30 (R)	9	Glossy	All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.

V4 - Random
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Les Bijoux

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DRBX

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards		
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm²	50 N/mm² (average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	3200 N (average value)
Resistance to surface abrasion (of glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 5 – DRBX 03 Class 4 – DRBX 01 & 02 Class 2 – DRBX 04 Class 1 – DRBX 05
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB GA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4
Reaction to fire	Based on the decision 96/603/CE and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20.5%

***PEI classifications**
PEI 1 – Very light traffic
PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
October 2024