

# Select Marmi

*Porcelain Marble*




Floor & Kitchen Unit: DMJE 12 Polished

11 Colours / 2 Finishes / 5 Sizes / 2 Mosaics


Select Marmi is a porcelain tile range that emphatically expresses the nature of precious marbles and travertine. The refined details and high-quality finishes provide rich tones for individual and luxurious interiors.




Floor: DMJE 11 Polished




DMJE 19




DMJE 14



DMJE 12



DMJE 01




DMJE 02



DMJE 16




DMJE 03




DMJE 15



DMJE 05




DMJE 11



DMJE 17

## Sizes

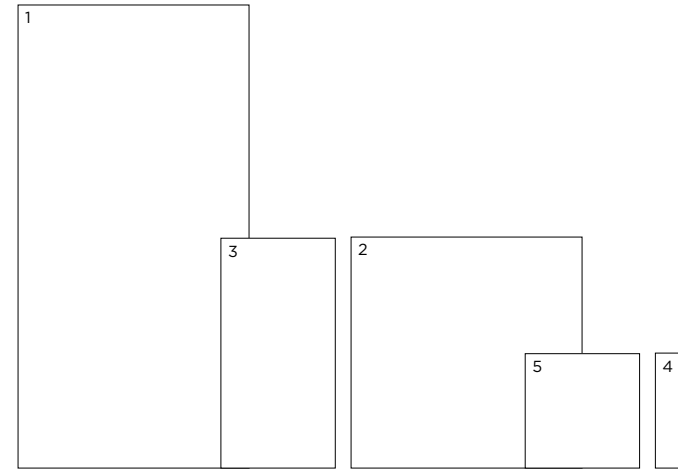

	Size (mm)	Thickness	Finish	Colour Availability
1	2398 x 1198 (R)	9	Polished	DMJE 01-03, 12, 14-16 & 19
2	1198 x 1198 (R)	9	Natural	DMJE 16 & 19
		9	Polished	DMJE 01-03, 12, 14-16 & 19
3	1192 x 595 (R)	9	Natural	DMJE 14, 15, 16 & 19
		9	Polished	DMJE 01-03, 12, 14-17 & 19
4	598 x 146 (R)	9-10	Natural	DMJE 14, 15, 16 & 19
		9-10	Polished	All colours
5	595 x 595 (R)	9	Natural	DMJE 14, 15, 16 & 19
		9	Polished	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Mosaics and special pieces shown on next page.

V2 - Moderate  
Shade Variation


**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com



Wall: DMJE 02 Polished

## Mosaics & Special Pieces

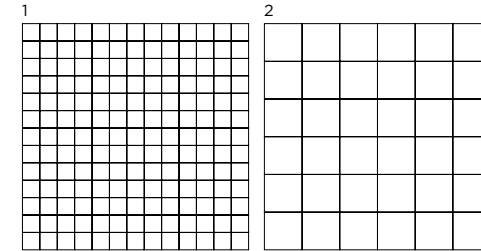

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 22 x 22 on 300 x 300 sheet	9	Polished	All colours
2	36T Mosaic 48 x 48 on 300 x 300 sheet	9	Natural	DMJE 01-03, 11, 12, 14-17 & 19
	Skirting 600 x 72	9	Natural Polished	All colours All colours
	Step Tread 600 x 300	9	Natural Polished	All colours All colours
	Grooved Step Tread 600 x 300	9	Natural	All colours
	Bullnose Step Tread 600 x 330	9	Natural Polished	All colours All colours
	Angle Bullnose Step Tread 330 x 330	9	Natural Polished	All colours All colours

Swatch colours may vary from original. Samples should be requested.



V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Select Marmi

## Technical Data

Glazed Porcelain (BS EN 14411 – Group Bla) – Polished

Use: Floors & Walls

Product Code: DMJE

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size N)		Actual Value
		70mm ≤ N < 150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Natural
Areas with bare feet	DIN 51097	A over 12° to 18°	Natural
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2024

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.1% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	≥ 50 N/mm <sup>2</sup> (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 2500 N (typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm <sup>3</sup>	< 150 mm <sup>3</sup> (typical value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	<b>Polished</b> Class 2 – DMJE 17 Class 3 – DMJE 05 & 11 Class 4 – DMJE 16 Class 5 – DMJE, 01, 02, 03 12, 14, 15 & 19
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	6.2 x 10 <sup>-6</sup> / °C <sup>-1</sup> (typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA - Natural GLA - Polished
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA - Natural
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA - Natural GA - Polished
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			0%

#### \*PEI classifications

- PEI 1 - Very light traffic
- PEI 2 - Light traffic
- PEI 3 - Light to moderate traffic
- PEI 4 - Moderate to heavy traffic
- PEI 5 - Heavy to extra heavy traffic



**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com