

Slate Life Magnum

Lightweight Slabs / Porcelain Stone



Floor: DMAG 220 Matt

4 Colours / 1 Finish / 4 Sizes

Slate Life Magnum evokes relaxing elements with a rustic touch with neutral colours in airy, rigorous spaces. This lightweight porcelain slab range rediscovers the authenticity and warmth of a lost world, refashioning it with contemporary sobriety.



Wall & Floor: DMAG 221 Matt



Wall: DMAG 222 Matt



Floor: DMAG 220 Matt

Sizes



DMAG 219




DMAG 220



DMAG 221




DMAG 222

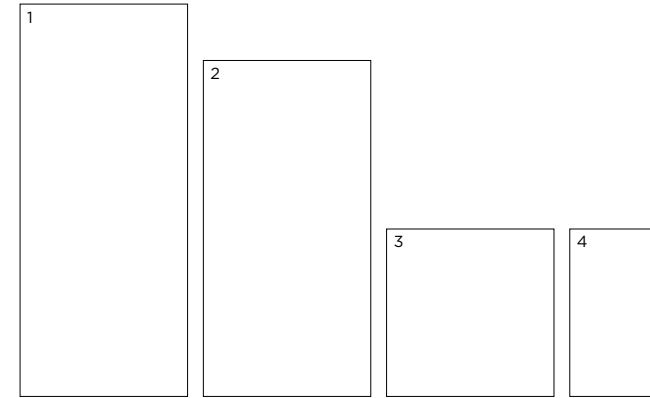

	Size (mm)	Thickness	Finish	Colour Availability
1	2797 x 1197 (R)	6	Matt	All colours
2	2397 x 1197 (R)	6	Matt	All colours
3	1197 x 1197 (R)	6	Matt	All colours
4	1197 x 597 (R)	6	Matt	All colours
	Plinth Skirting 597 x 46	6	Matt	All colours


(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.

V3 - High Shade Variation

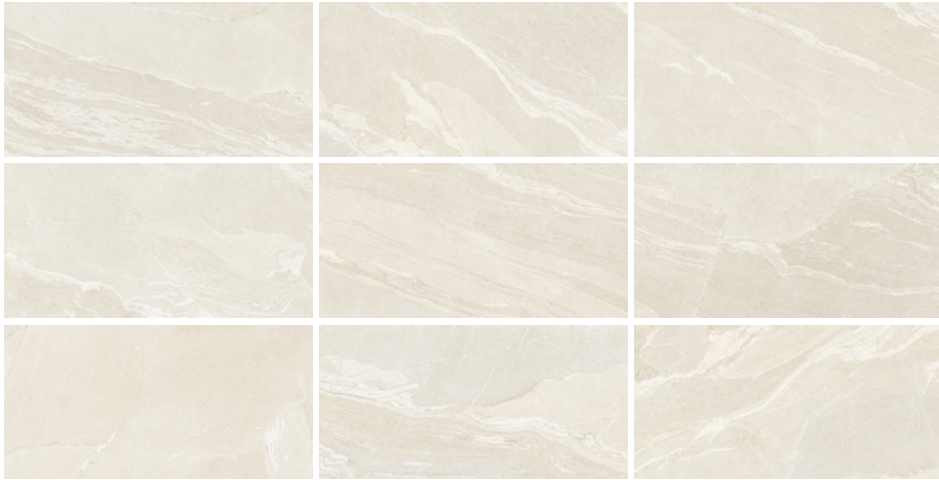

DMAG 219 Matt


V3 - High Shade Variation

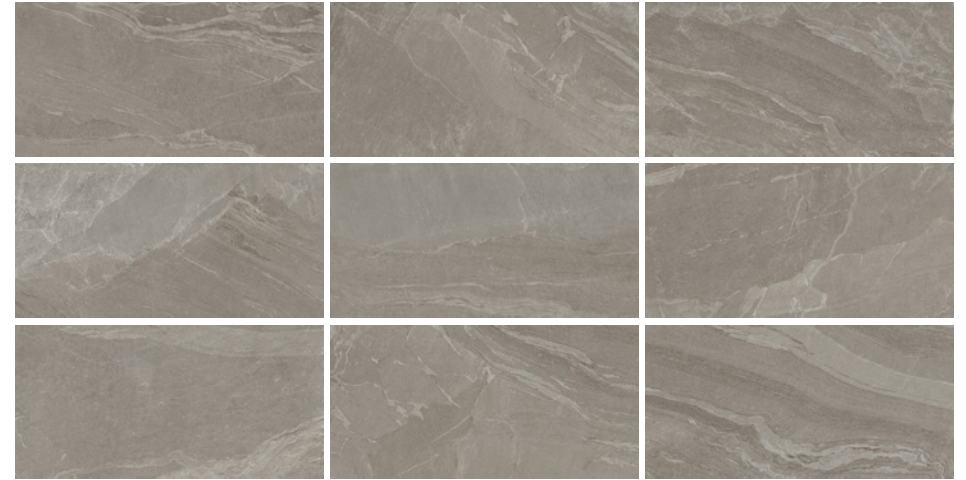

DMAG 221 Matt



DMAG 220 Matt

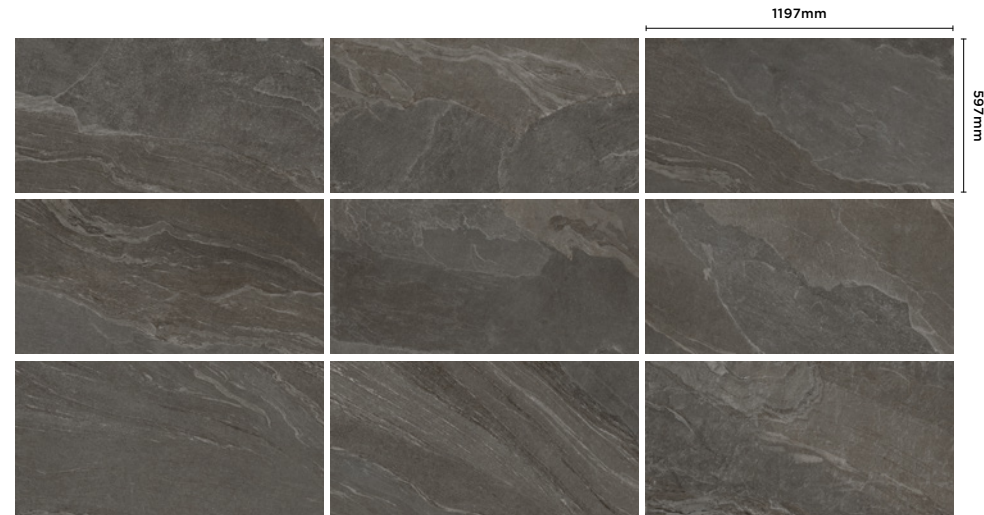

DMAG 222 Matt

Slate Life Magnum

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DMAG 219-222

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN 16165 (Annex B)	R10 from 10° to 19°	Matt
Areas with bare feet	BS EN 16165 (Annex A)	B over 18° to 24°	Matt
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	1350 N (Average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (Average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 4-5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2025

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com